


# INTRINSIX

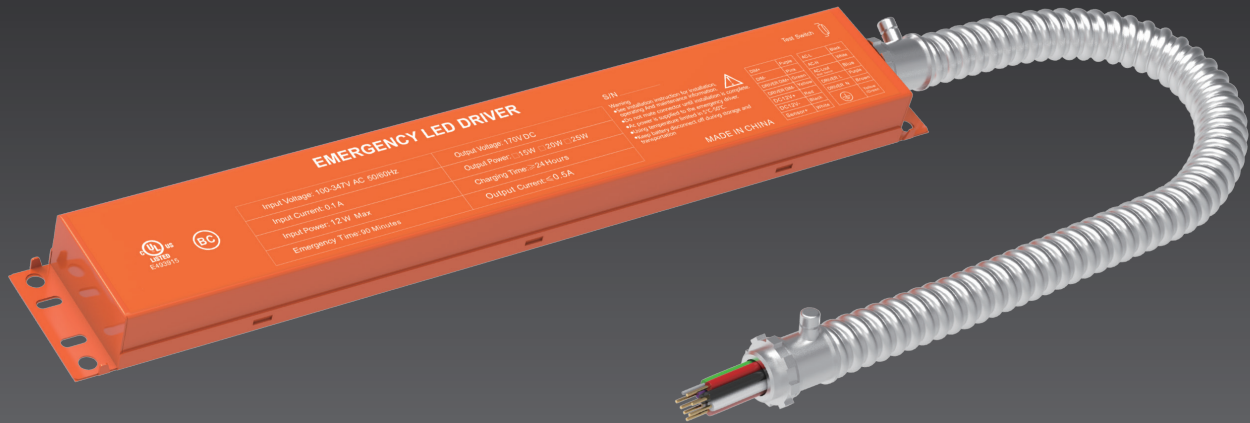


## EM DRIVER

EMERGENCY BATTERY BACKUP

# EM DRIVER

## EMERGENCY BATTERY BACKUP

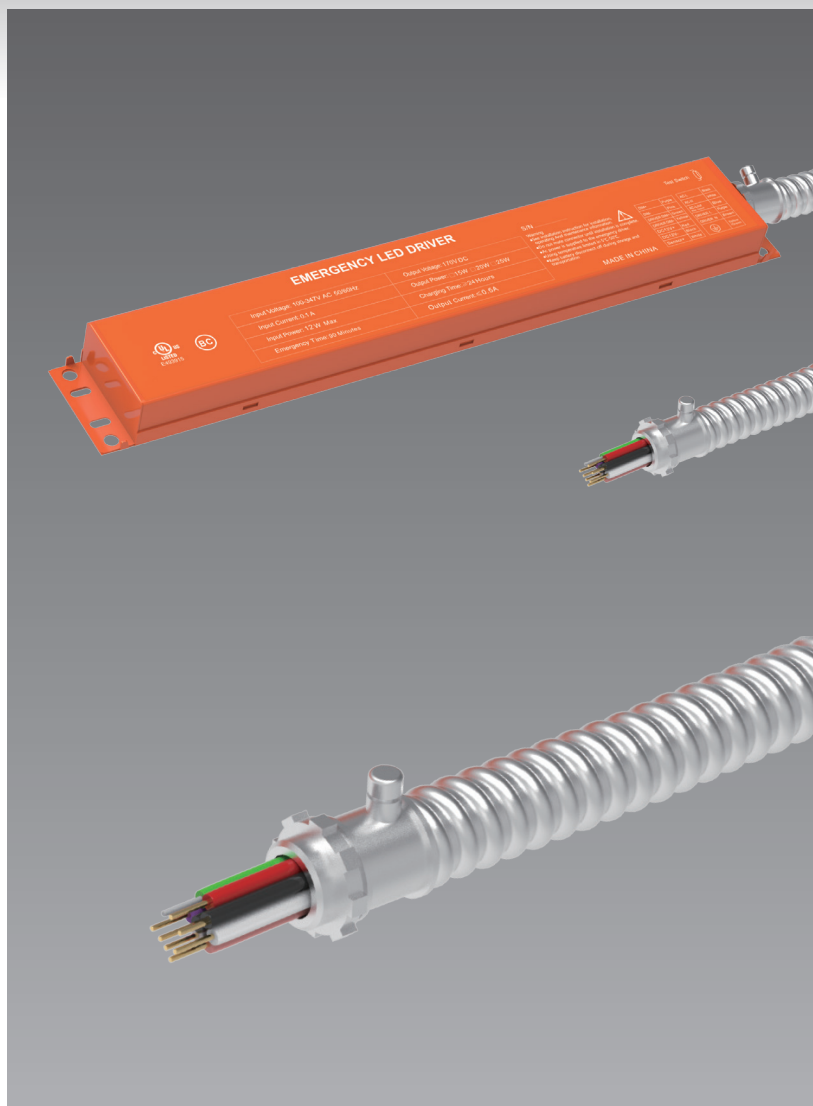

### Description

The IntrinsicX Battery Backup option is designed with a universal application in mind.

With options at 8, 15, and 25W many popular applications are covered.


This driver is line side only and can be configured with any application where the fixture or box has a 1/2" knockout.

### Specifications




- Output Power: 8W, 15W and 25W
- Dimming: 0-10V
- Voltage: 100-347VAC, 50/60Hz
- Operating Temp: 41°F to 122°F
- Warranty: 5 Years

### Emergency Backup Fixture Details


Product Number	Input Voltage (V)	Input Current max (A)	Input Power max (W)	Output Voltage (V)	Output Power (W)	Ambient Temperature	Dimming (V)
IX-EBB-HM08-YYY	100-347	0.1	12	170	8	41°F to 122°F	0-10
IX-EBB-HM15D-YYY	100-347	0.1	12	170	15	41°F to 122°F	0-10
IX-EBB-HM25D-YYY	100-347	0.1	12	170	25	41°F to 122°F	0-10




## Product Dimensions

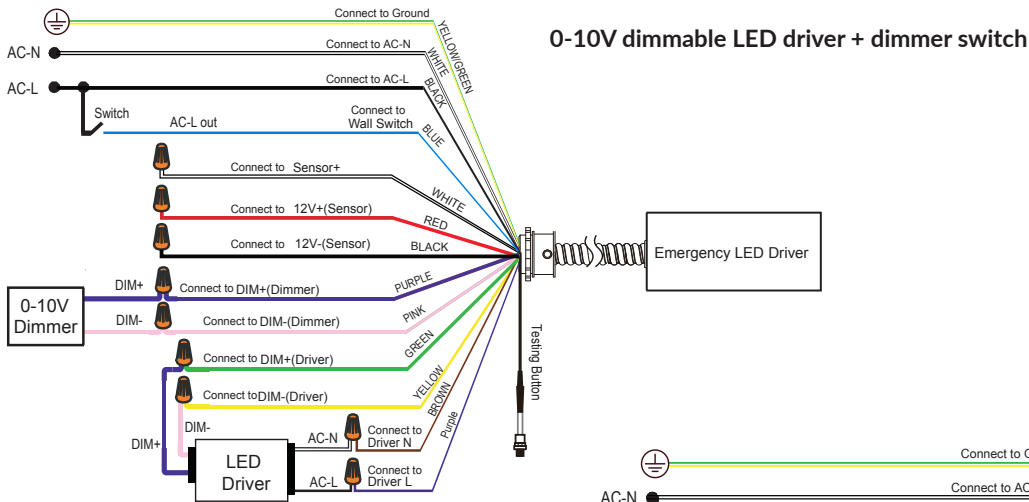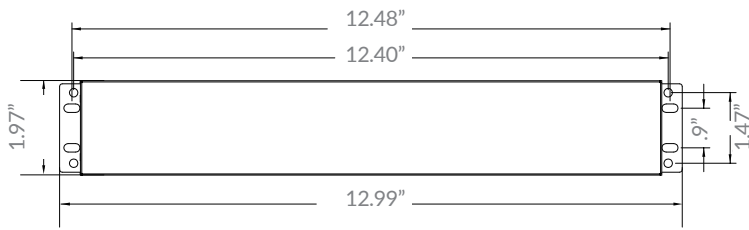

**0-10V dimmable LED driver + wall switch**

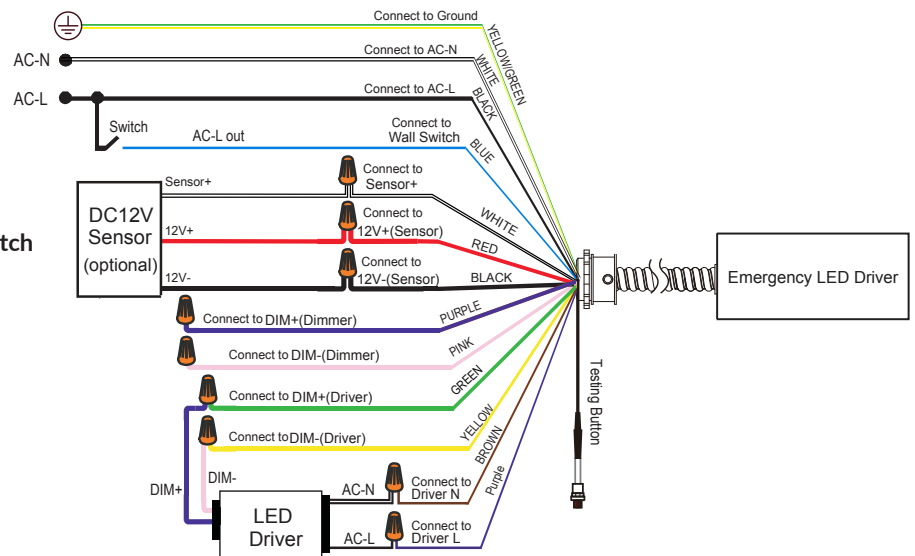

**Non dimmable LED driver**

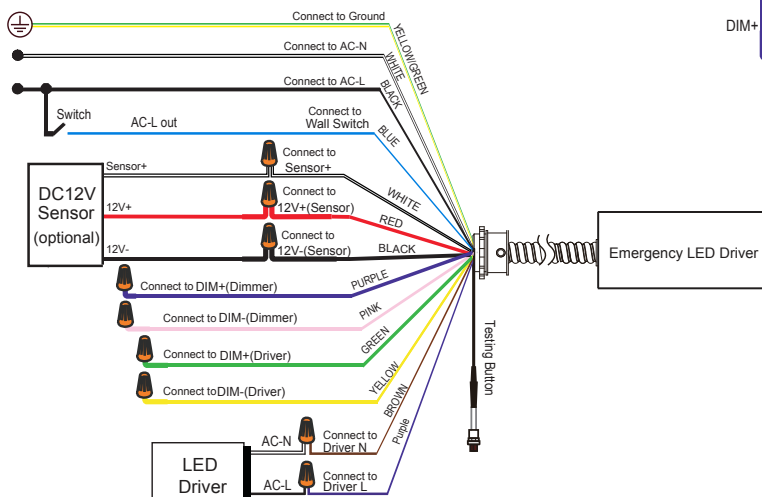

The ETL Listed mark is an indicator of the product's compliance with safety regulations, recognized and accepted by the UL and CSA marks. As Intertek's ETL subjects' products to UL standards for safety, products marked as ETL Listed meet the same rigorous criteria as marked with UL Lister or UL Recognized. Intertek ETL is a Nationally Recognized Testing Laboratory (NRTL) recognized by the Occupational Safety and Health Administration (OSHA).



The Federal Communications Commission (FCC) is an independent agency of the United States government that was created to regulate all forms of telecommunication inside of the U.S., including the radio frequency (RF) of electronics. Our products are fully tested ensure that they will not electromagnetically interfere with other products nor cause risk to the public as required by law.