

INTRINSIX



TRITON

PRODUCT PROFILE

TRITON

LED CANOPY LIGHT



Description


The TRITON LED canopy light is the best in its class for power efficiency when it comes to ceiling-mounted security.

They are great for a range of commercial applications including gas stations, shopping malls, underground parking lots, hospitals, warehouses, factories and any other areas in need of adequate lighting.

These color and wattage selectable LED canopies are easy to install.


Specifications

- Voltage: 120-277VAC
- IP Rating: IP65
- Operating Temp: -40°F to 122°F
- Power Factor: >0.9
- DLC: Premium
- Sensor: 3 Pin Sensor Base
- Warranty: 50,000 Hours/5 Years

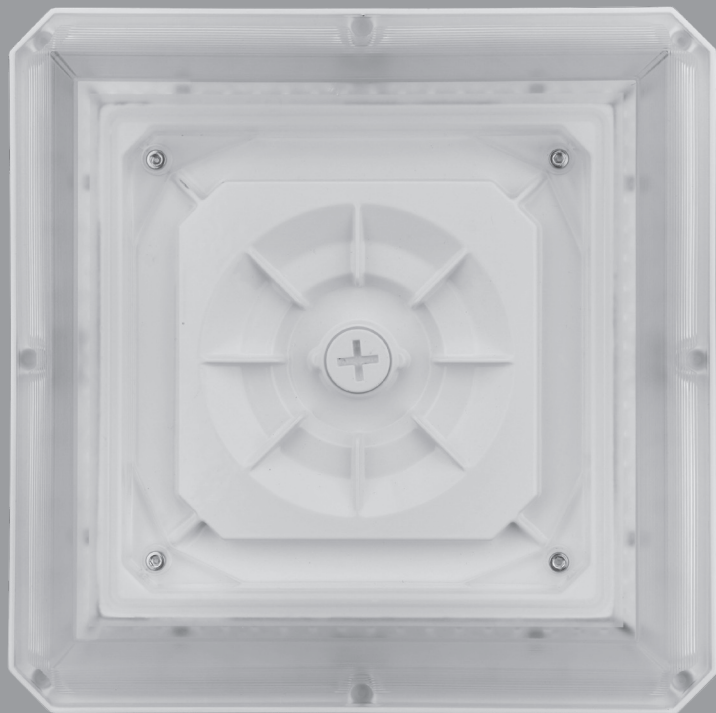


Fixture Details


Product Number	Power (W)	CCT (K) Optional	CRI	Efficacy (Lm/W)	Lumens Output Temperature (Lm)	Operating Temperature	IP Rating	DLC Product ID
IX-CNP-40/60/75-30/40/50LO	40/60/75	3000/4000/5000	>80	130	5200/7800/9750	-40°F to 122°F	IP65	S-7RCBDK



Distribution Diagram

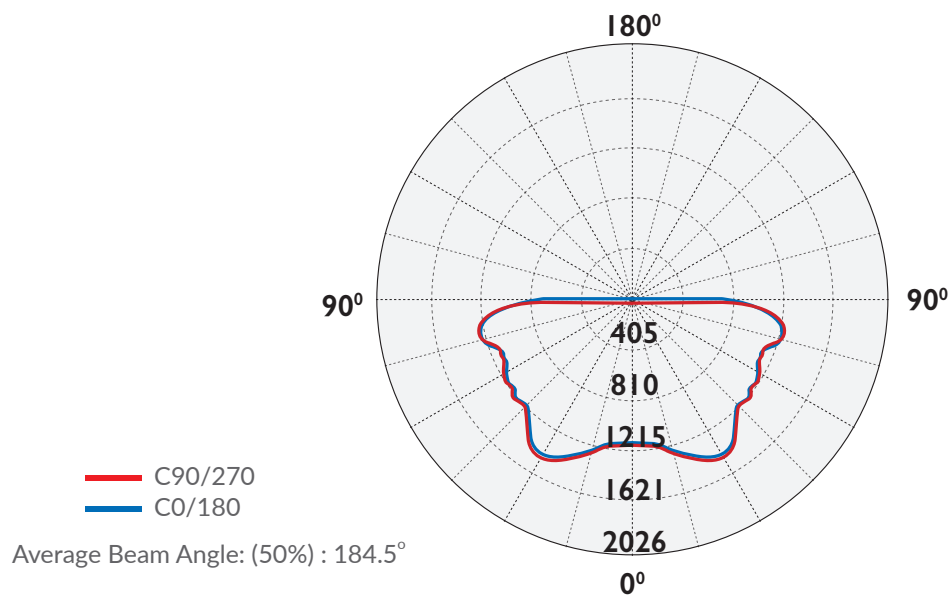

Product Dimensions

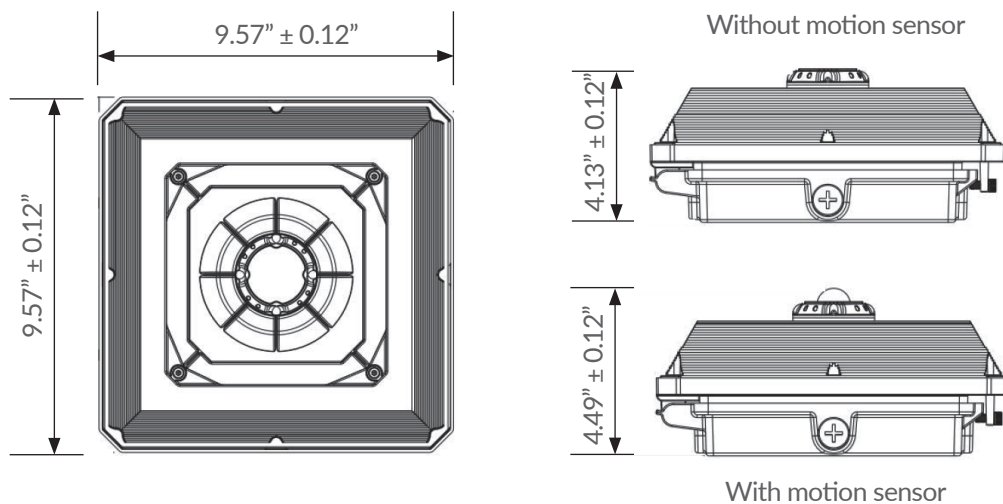

The ETL Listed mark is an indicator of the product's compliance with safety regulations, recognized and accepted by the UL and CSA marks. As Intertek's ETL subjects' products to UL standards for safety, products marked as ETL Listed meet the same ridged criteria as marked with UL Lister or UL Recognized. Intertek ETL is a Nationally Recognized Testing Laboratory (NRTL) recognized by the Occupational Safety and Health Administration (OSHA).



The Federal Communications Commission (FCC) is an independent agency of the United States government that was created to regulate all forms of telecommunication inside of the U.S. including the radio frequency (RF) of electronics. Our products are fully tested ensure that they will not electromagnetically interfere with other products nor cause risk to the public as required by law.