

Report No.:

Test Time: 2022-5-18 23:10

## Luminaire Property

Luminaire Manufacturer:

Luminaire Category:

Lamp Catalog:

Number of Lamps:

Luminous Length (mm):

Luminous Height (mm):

Current: 1.015 A

Power Factor: 0.996

Luminaire Description:

Lamp Description:

Lumens per Lamp:

Luminous Width (mm):

Voltage: 120.0 V

Power: 121.42 W

## Photometric Results

IES Classification: Type II

Total Rated Lamp Lumens: 15938.5 lm

Efficiency: 100%

Upward Ratio: 0%

C0r0 Intensity: 6132.94 cd

Pos of Max. Intensity: H135 V4

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 111.9, 104.6, 113.0, 112.7

Longitudinal Classification: Very Short


Measurement Flux: 15938.5 lm

Downward Ratio: 100%


Luminaire Efficacy Rating (LER): 131.32

Max. Intensity: 6155.04 cd

Picture Of Luminaire



Luminous Intensity Distribution Curve

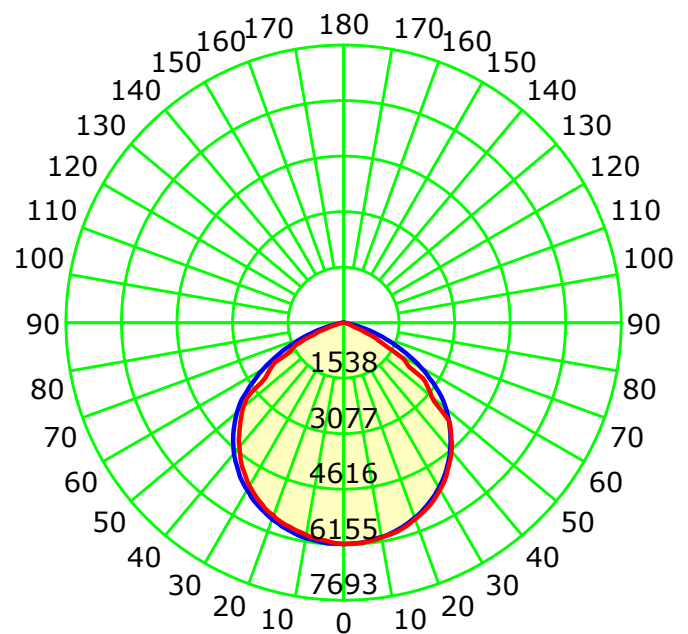

Unit: cd

Average Diffuse Angle(50%): 108.2°

— C0-C180 — C90-C270

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

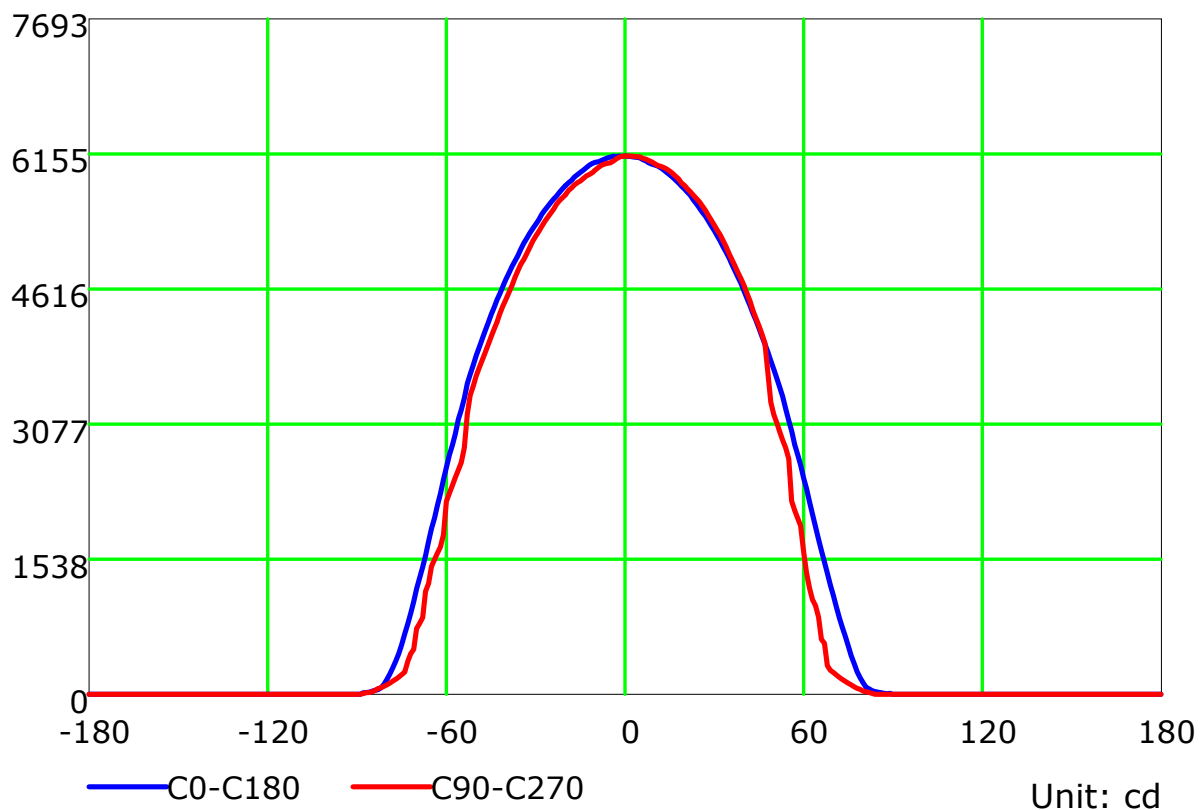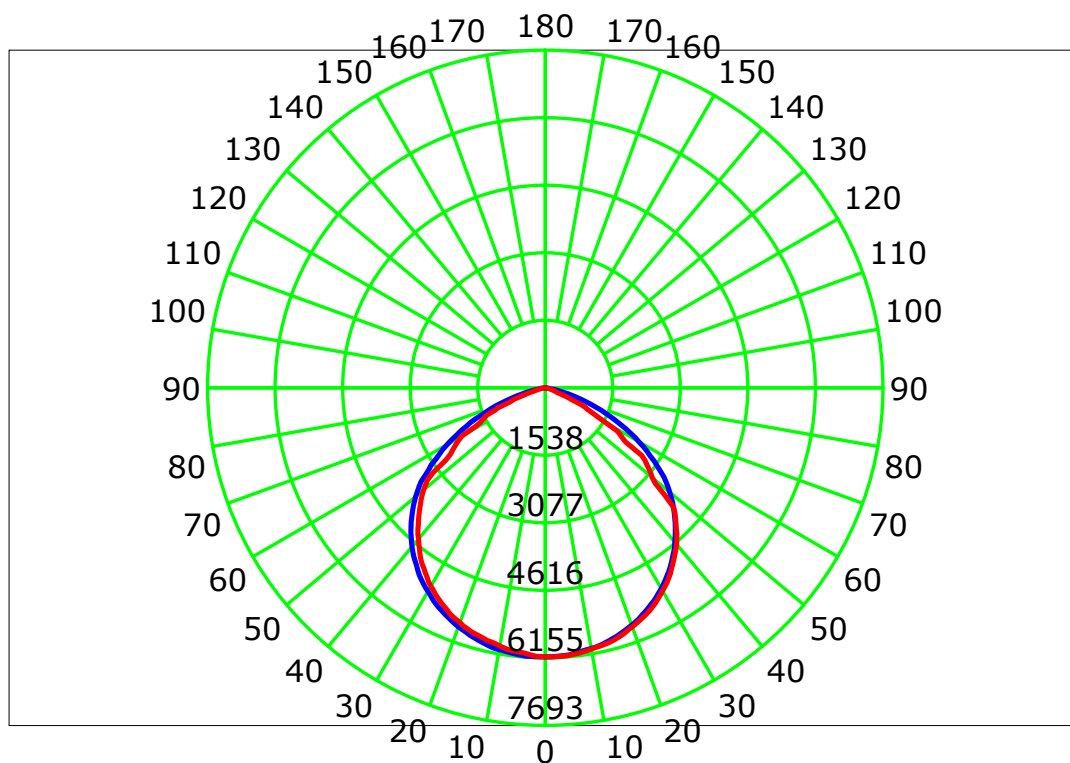

C Plane (°):0.0-360.0: 22.5  
Test Lab:  
Test Type: TYPE C  
Temperature: 24.8 'C  
Operator:

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-3000  
Distance: 14.140 m [K=1.0000]  
Humidity:  
Inspector:


## Luminous Intensity Distribution Curve(cd/klm)

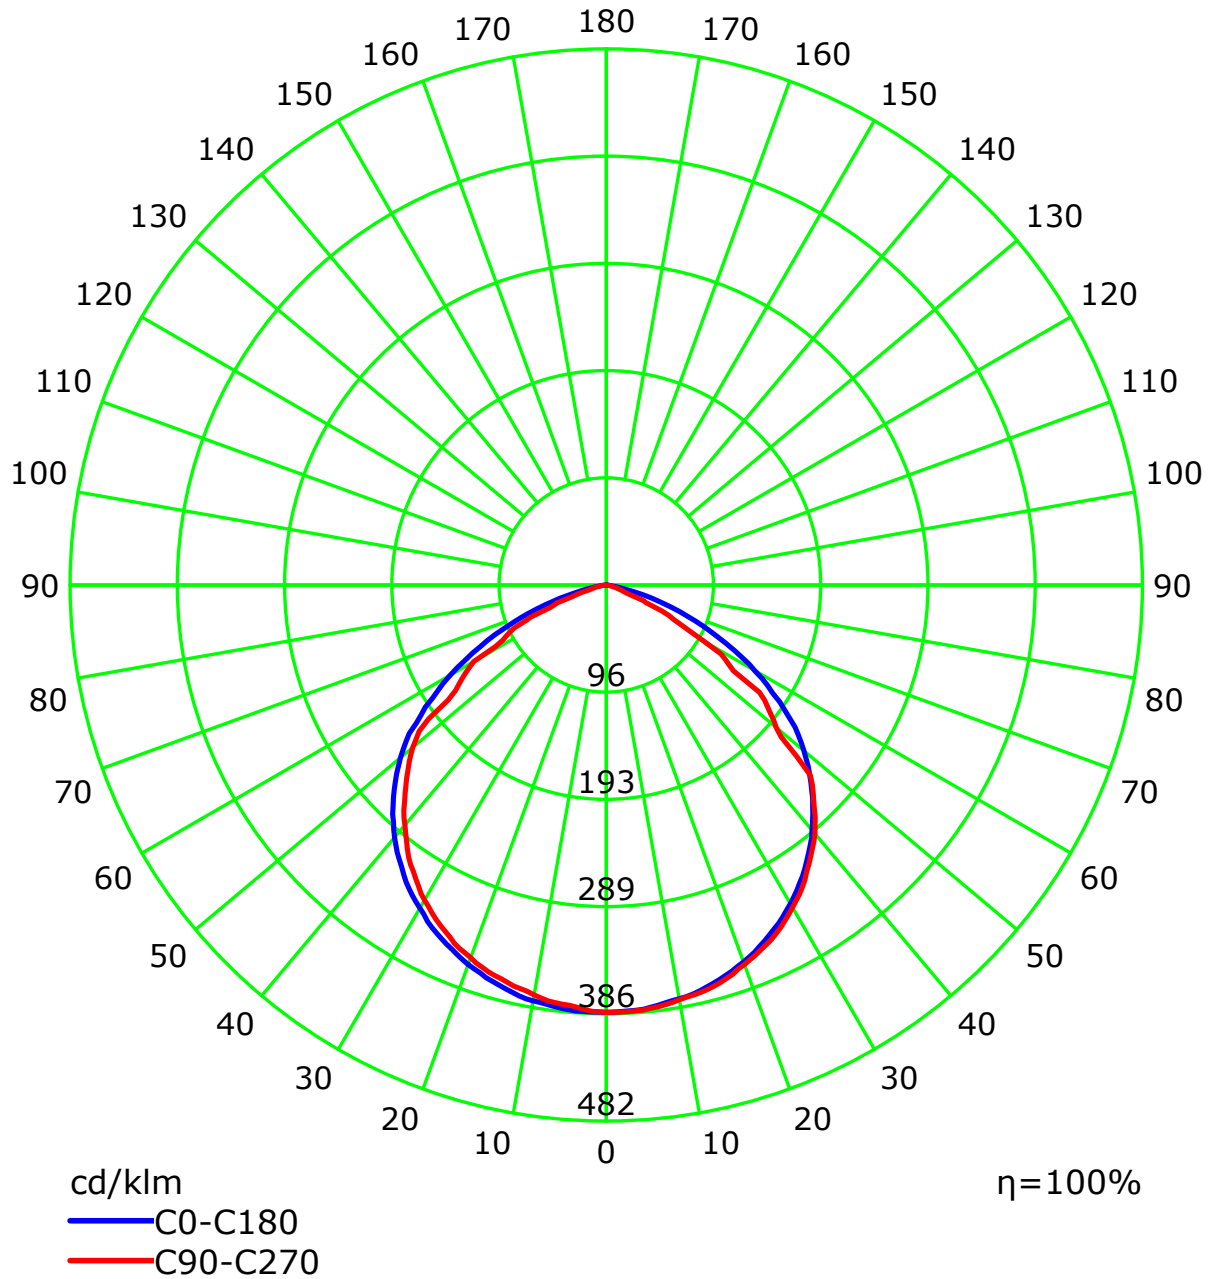

C Plane (°):0.0-360.0: 22.5  
Test Lab:  
Test Type: TYPE C  
Temperature: 24.8 'C  
Operator:

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-3000  
Distance: 14.140 m [K=1.0000]  
Humidity:  
Inspector:

## Isocandela (rectangle)

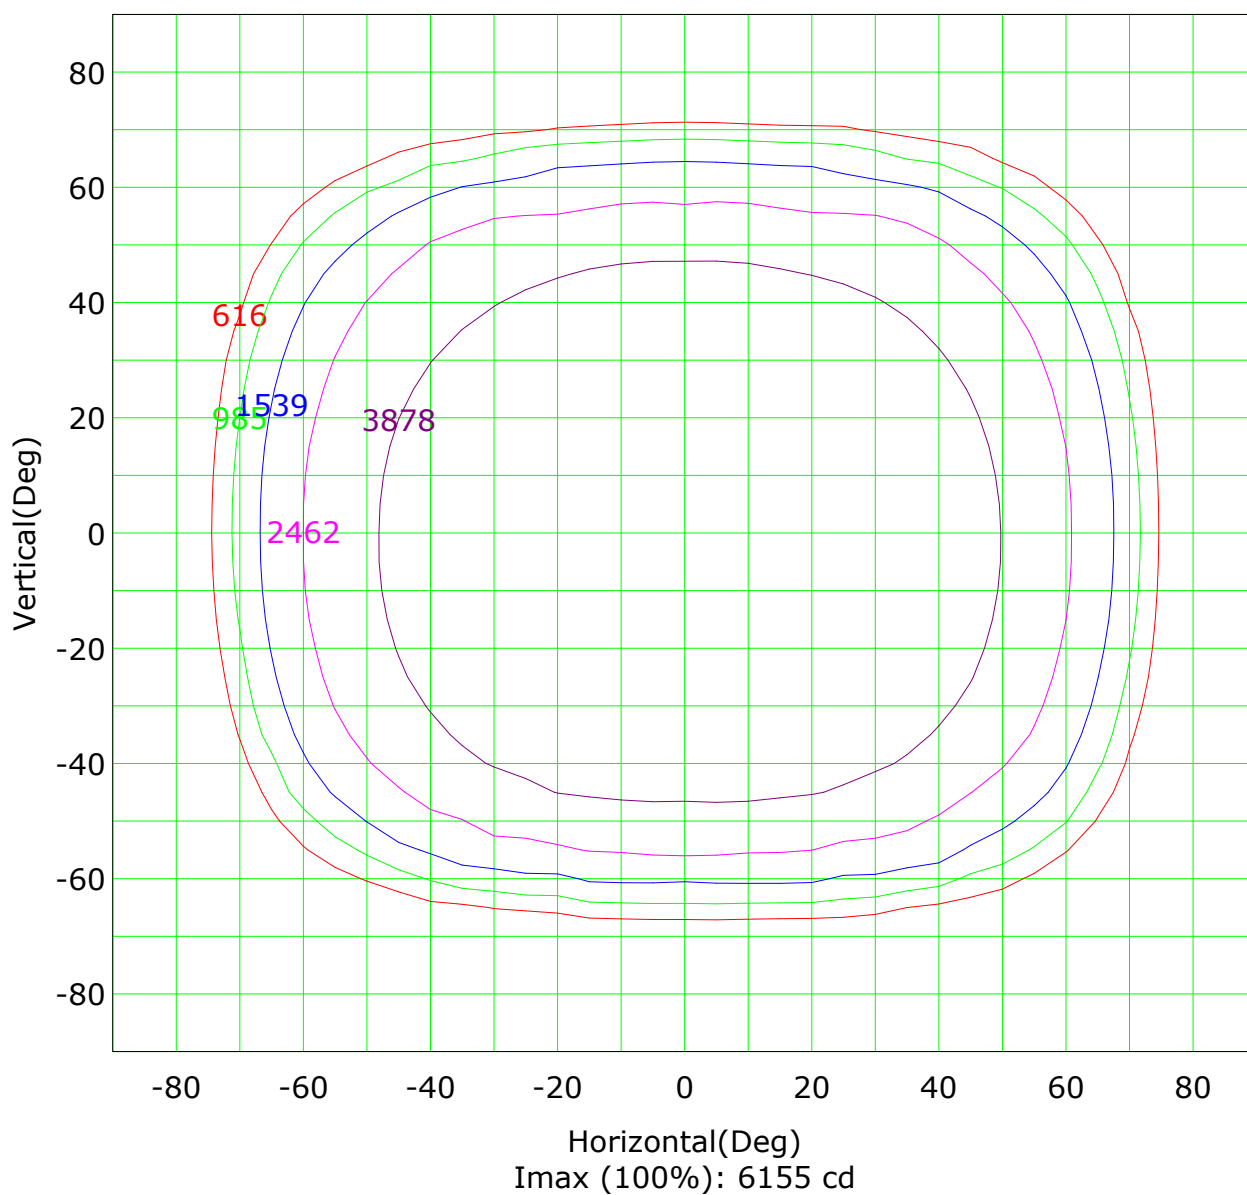


( 10%): 616 cd	( 16%): 985 cd
( 25%): 1539 cd	( 40%): 2462 cd
( 63%): 3878 cd	(100%): 6155 cd

C Plane (°):0.0-360.0: 22.5  
Test Lab:  
Test Type: TYPE C  
Temperature: 24.8 'C  
Operator:

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-3000  
Distance: 14.140 m [K=1.0000]  
Humidity:  
Inspector:

## Isocandela (sphere)

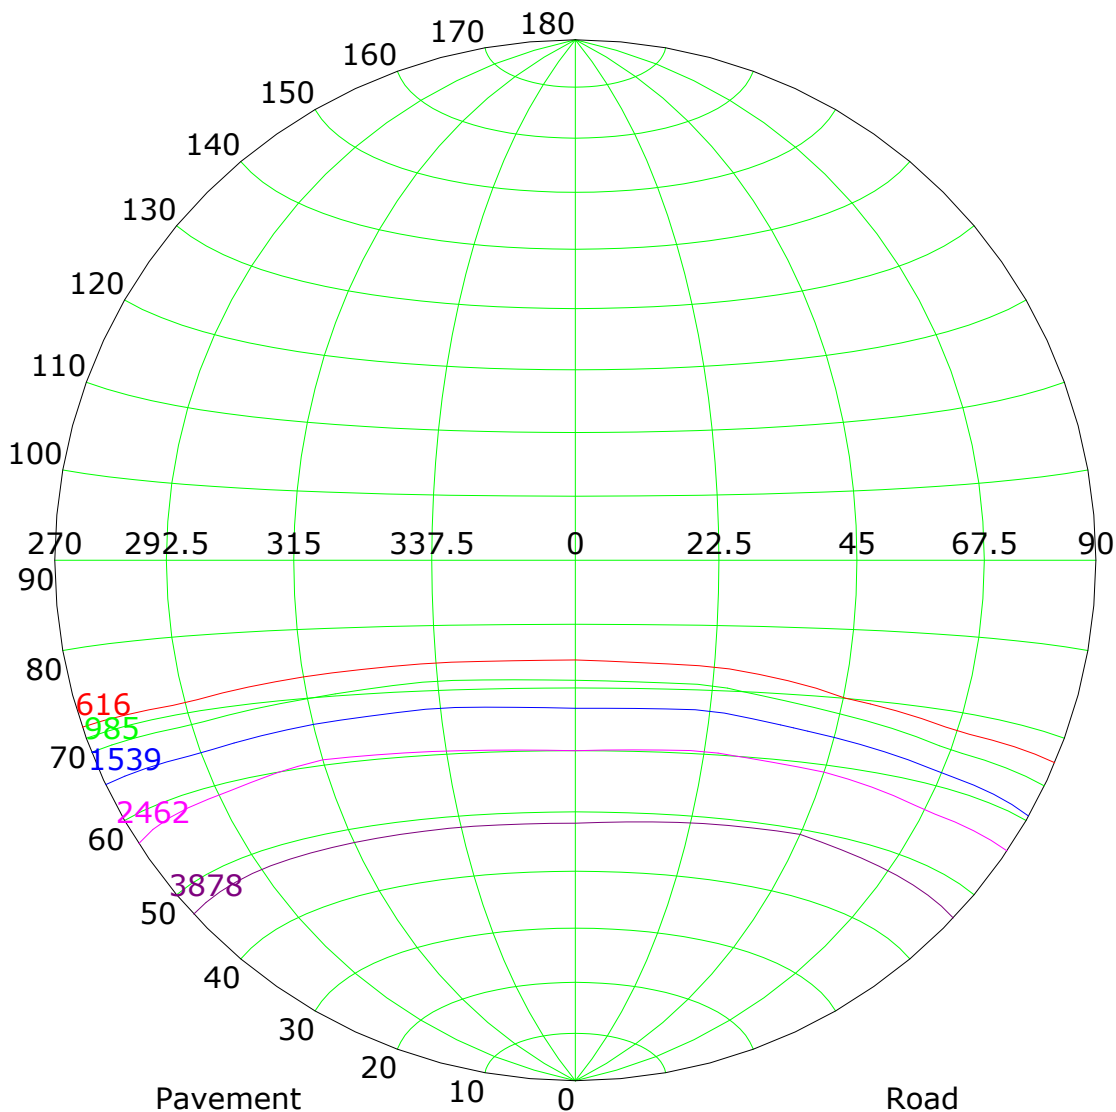

Imax (100%): 6155 cd

( 10%): 616 cd  
( 25%): 1539 cd  
( 63%): 3878 cd

( 16%): 985 cd  
( 40%): 2462 cd  
(100%): 6155 cd


CIE: narrow - short  
CIE: Full-cut-off luminaire  
Max.At90: 0.000 cd/klm

IES: Cut-off  
Max.At80: 10.624 cd/klm  
Max.80-90: 10.624 cd/klm

C Plane (°):0.0-360.0: 22.5  
Test Lab:  
Test Type: TYPE C  
Temperature: 24.8 'C  
Operator:

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-3000  
Distance: 14.140 m [K=1.0000]  
Humidity:  
Inspector:

## IsoLux Plot

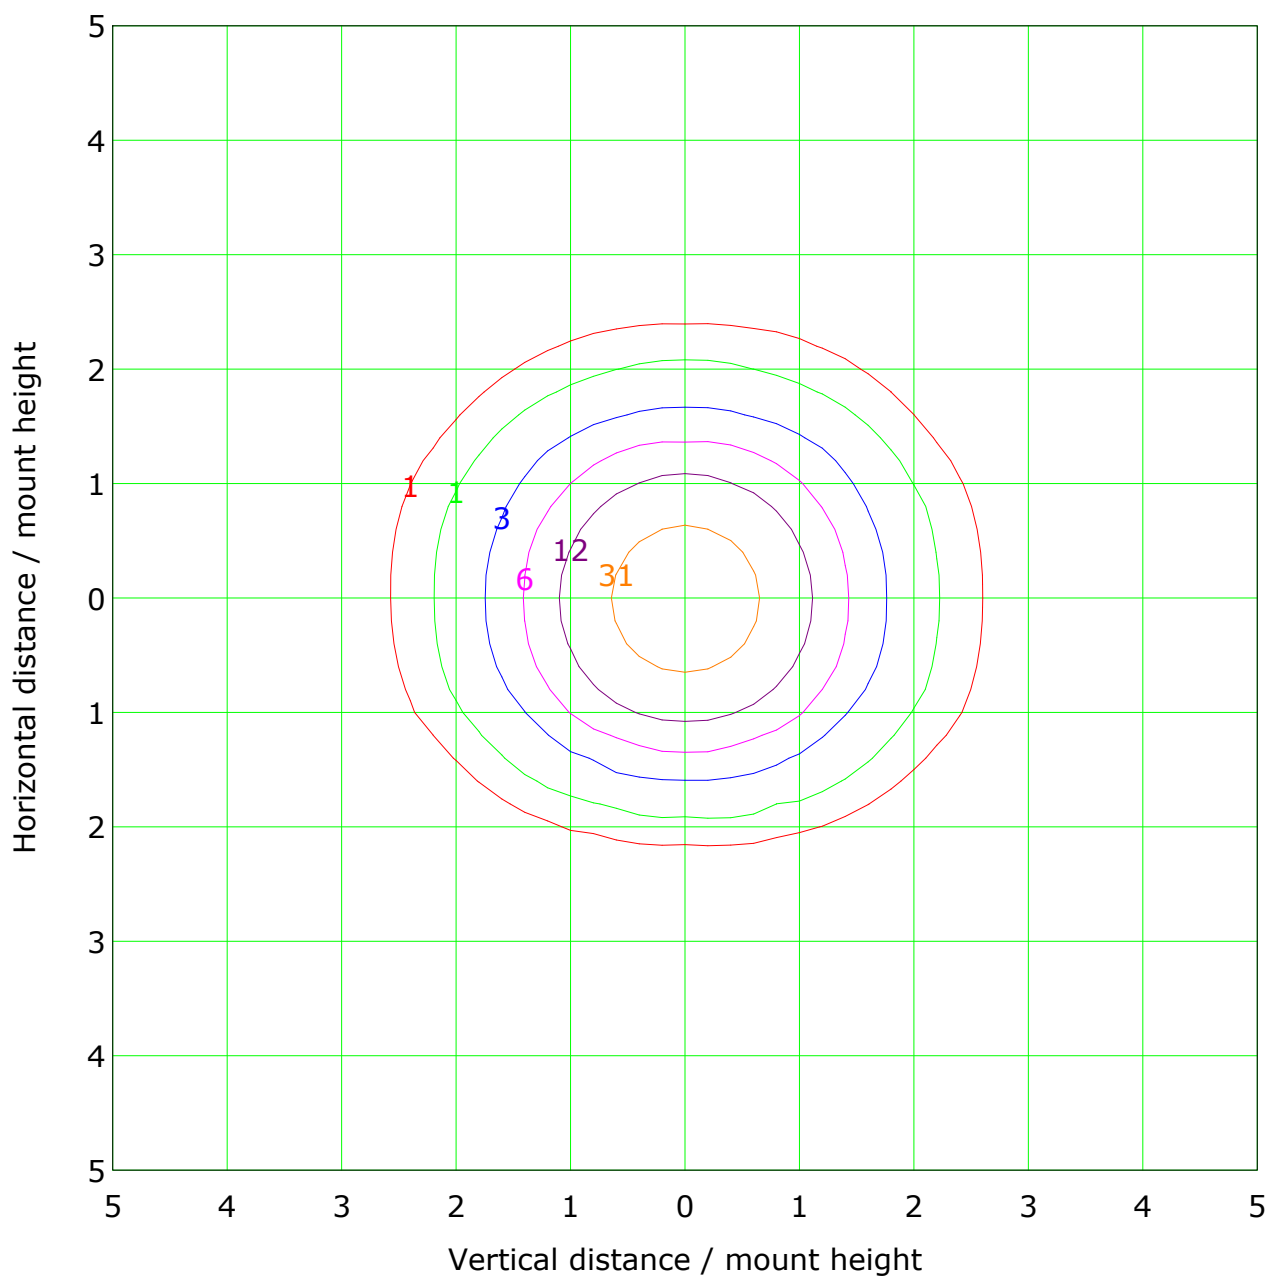



Mounting Height: 10.0m		Max Lux(100%): 61.4 lx	
— ( 1%):	0.6 lx	— ( 2%):	1.2 lx
— ( 5%):	3.1 lx	— ( 10%):	6.1 lx
— ( 20%):	12.3 lx	— ( 50%):	30.7 lx
— (100%):	61.4 lx		

C Plane (°):0.0-360.0: 22.5  
Test Lab:  
Test Type: TYPE C  
Temperature: 24.8 'C  
Operator:

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-3000  
Distance: 14.140 m [K=1.0000]  
Humidity:  
Inspector:

## Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

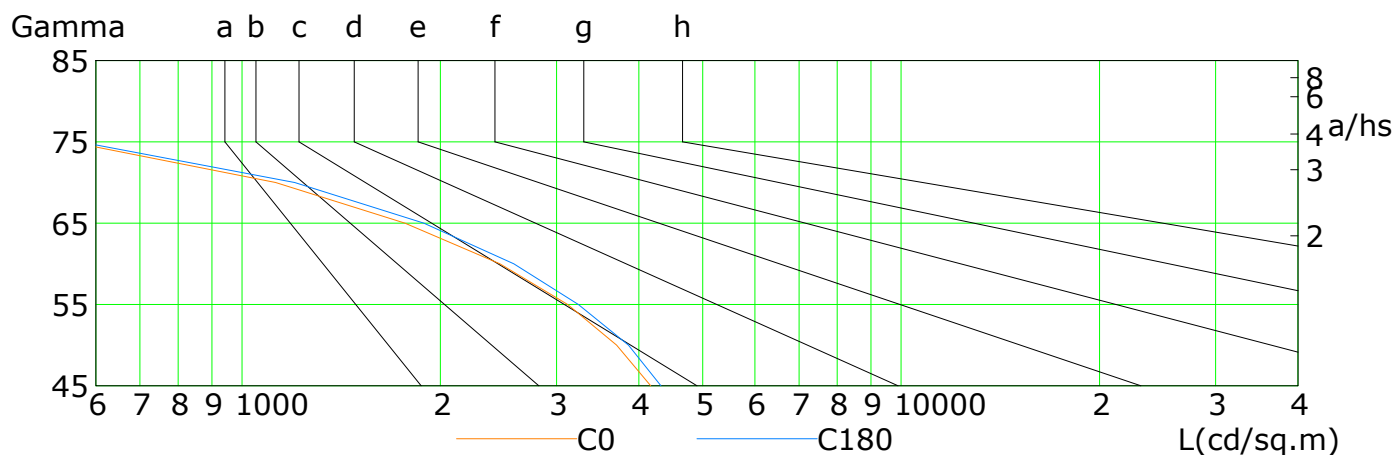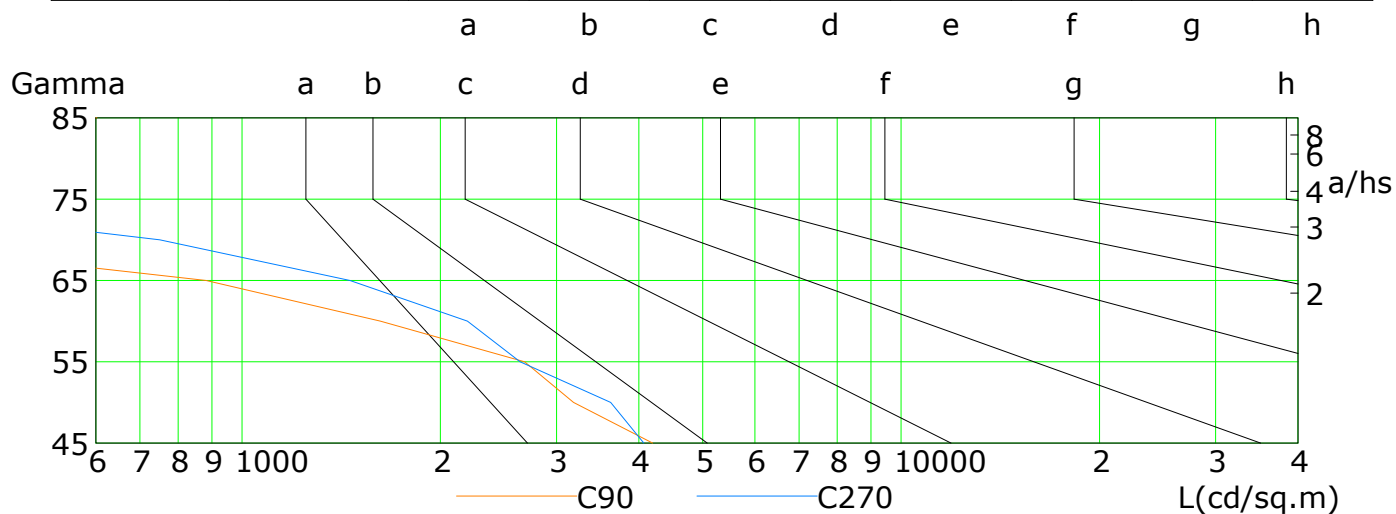

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	4170	3700	3119	2462	1767	1125	549	130	25
C90	4197	3183	2683	1621	882	249	126	37	0
C180	4322	3856	3238	2585	1887	1202	569	169	35
C270	4069	3626	2642	2197	1458	750	226	108	31

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Illuminance at a Distance

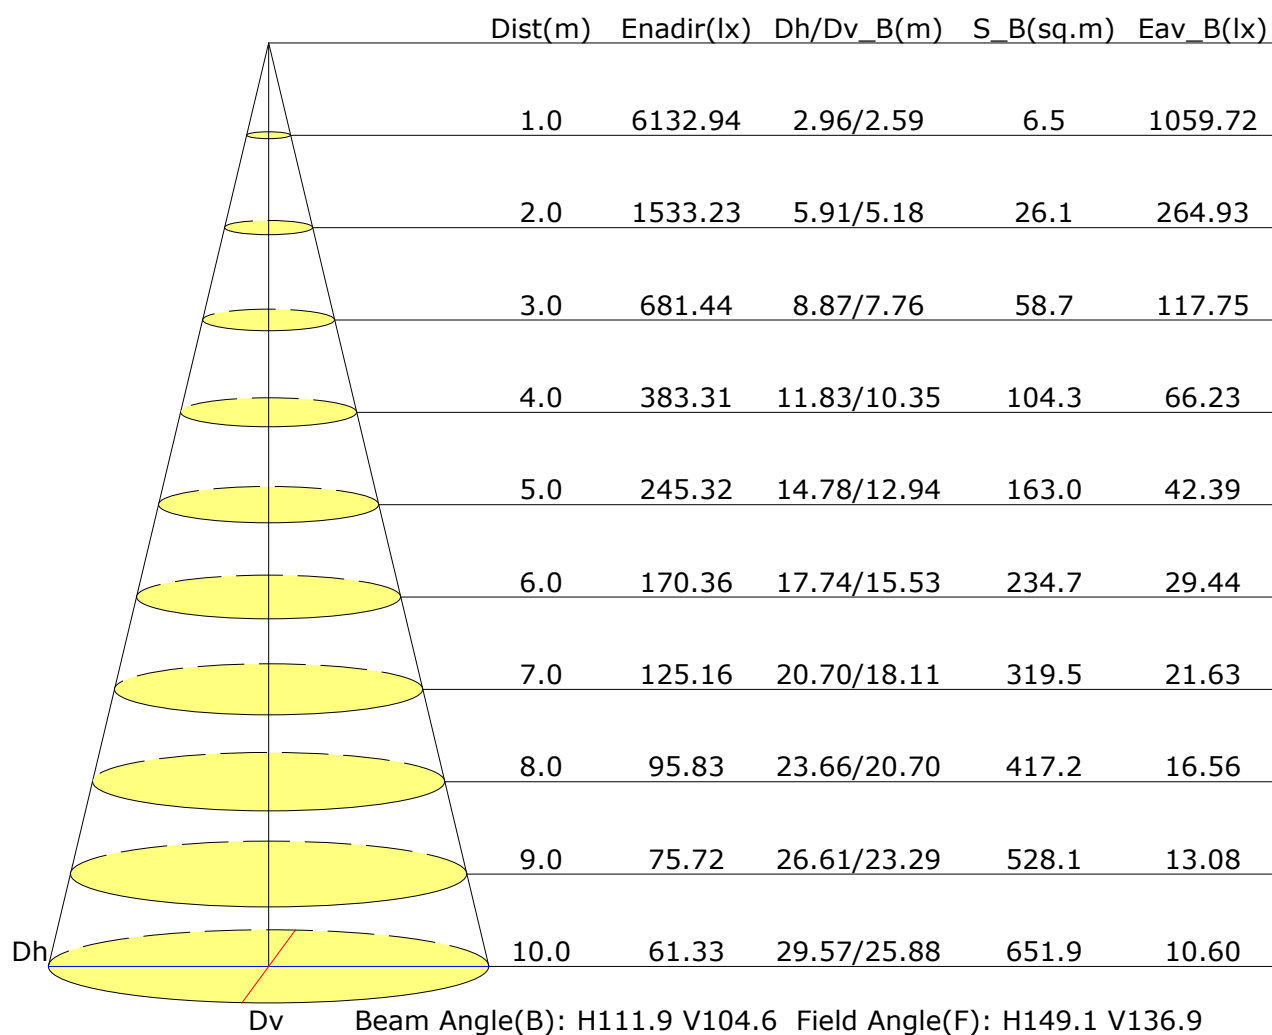


C Plane (°):0.0-360.0: 22.5  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 24.8 'C  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-3000  
 Distance: 14.140 m [K=1.0000]  
 Humidity:  
 Inspector:



## Vertical IsoLux Plot

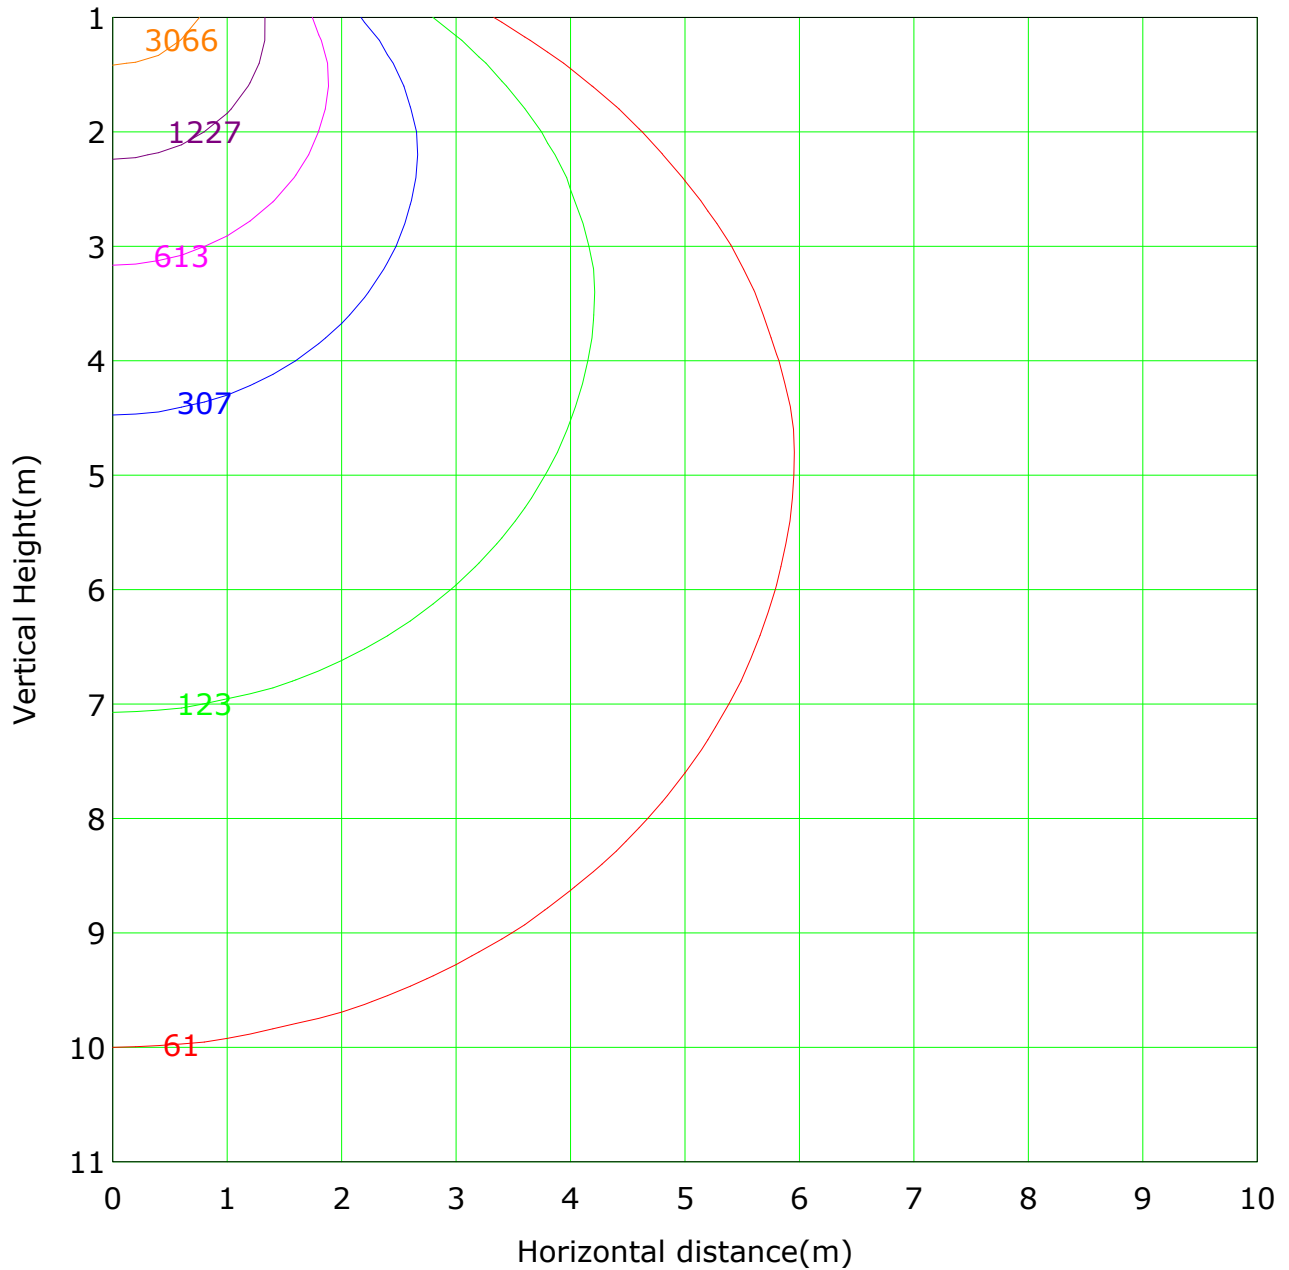

Lowest(m): 1.0m    Highest(m): 11.0m    Max Lux: 6132.9 lx


— ( 1%): 61.3 lx	— ( 2%): 122.7 lx
— ( 5%): 306.6 lx	— (10%): 613.3 lx
— (20%):1226.6 lx	— (50%):3066.5 lx
— (100%):6132.9 lx	

C Plane (°):0.0-360.0: 22.5  
Test Lab:  
Test Type: TYPE C  
Temperature: 24.8 'C  
Operator:

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-3000  
Distance: 14.140 m [K=1.0000]  
Humidity:  
Inspector:

## The Average Illuminance Effective Figure


Flux Out: 12949.55lm

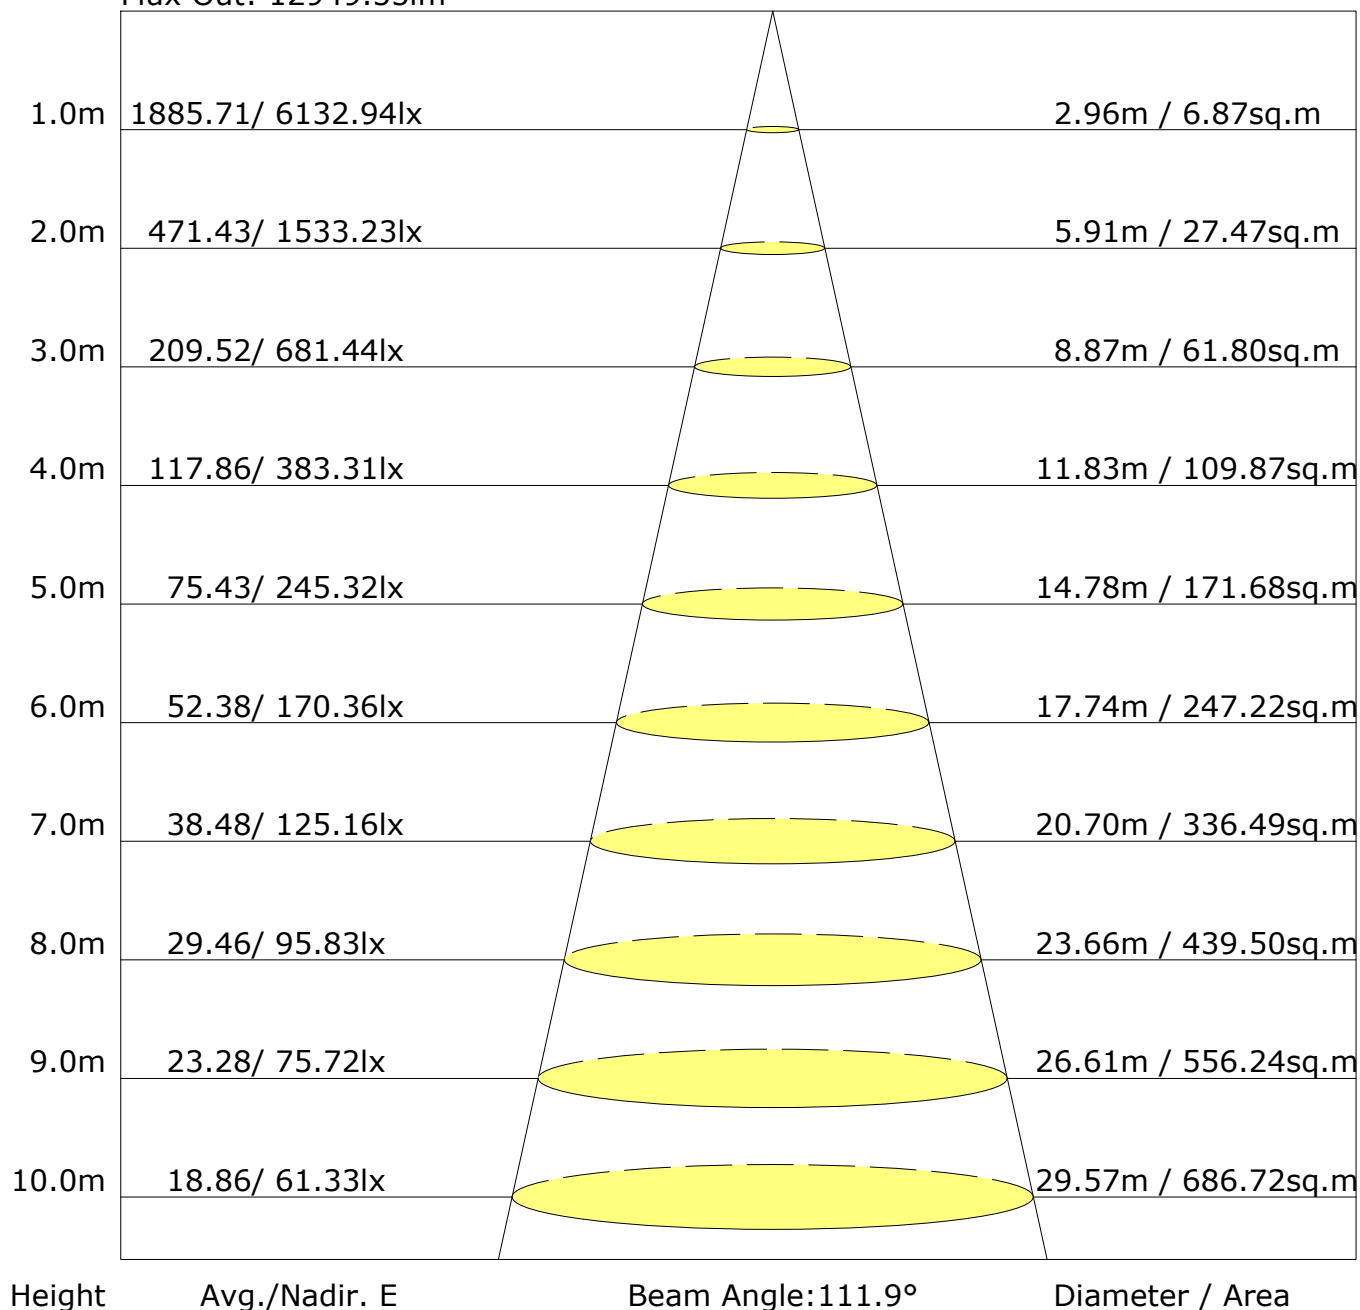

C Plane (°): 0.0-360.0: 22.5  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 24.8 °C  
 Operator:

Gamma Plane (°): 0.0-180.0: 1.0  
 Test Device: GPM-3000  
 Distance: 14.140 m [K=1.0000]  
 Humidity:  
 Inspector:

**FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM**

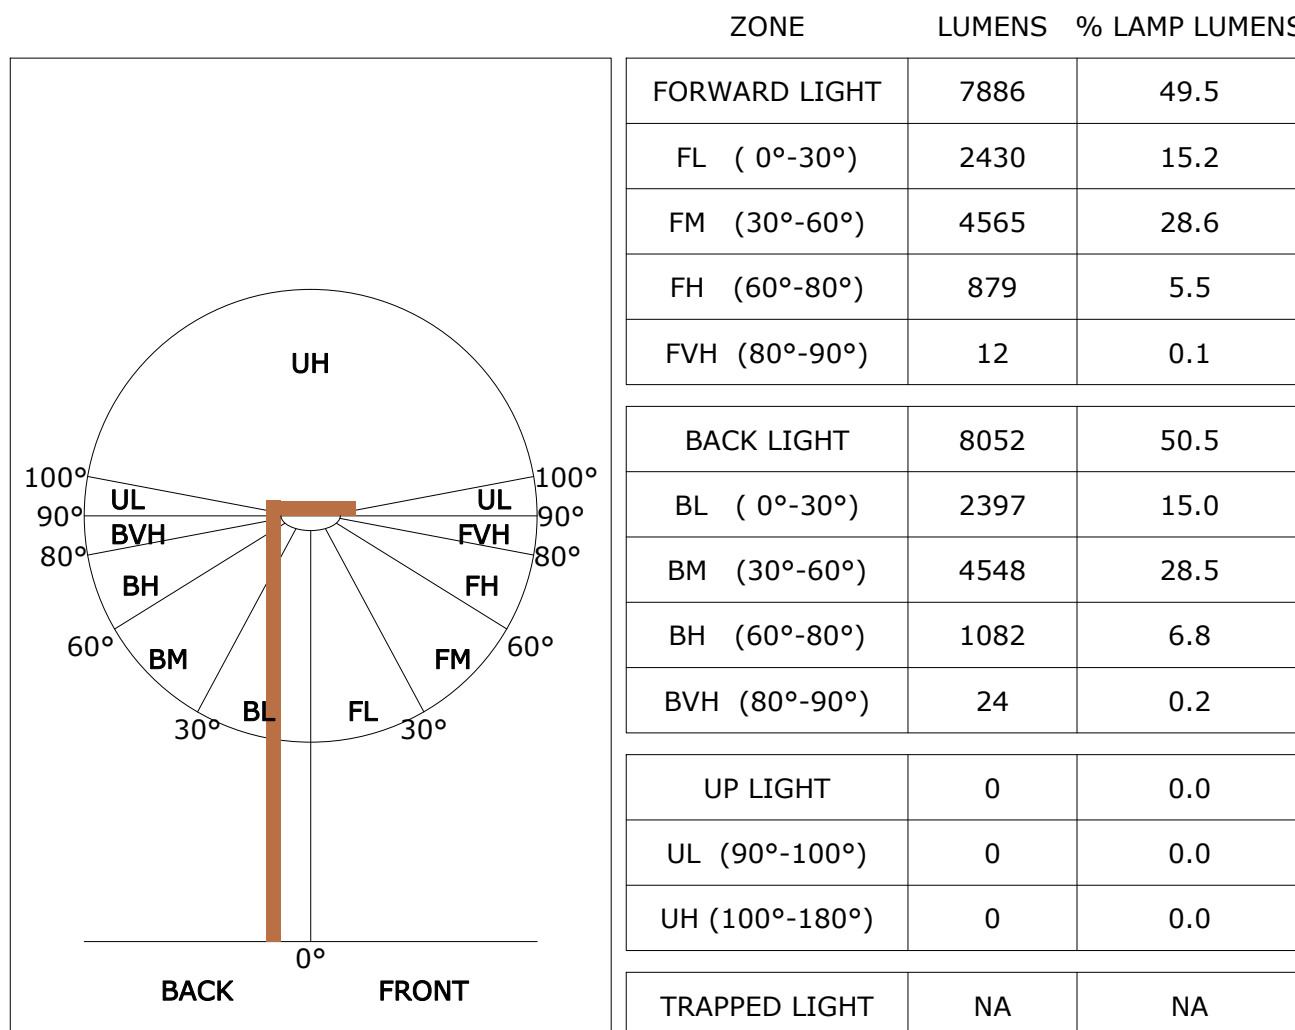

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B3 U1 G3
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B3 U1 G1

C Plane (°):0.0-360.0: 22.5  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 24.8 'C  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-3000  
 Distance: 14.140 m [K=1.0000]  
 Humidity:  
 Inspector:

## Candlepower Table

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G0.0	6132.9	6132.9	6132.9	6132.9	6132.9	6132.9	6132.9	6132.9	6132.9	6132.9
G1.0	6129.7	6134.4	6137.1	6143.1	6132.0	6135.8	6140.2	6134.8	6128.9	6130.8
G2.0	6126.2	6128.9	6134.6	6148.4	6132.4	6135.8	6147.4	6136.2	6131.7	6134.0
G3.0	6120.6	6125.5	6132.9	6152.3	6129.4	6138.7	6152.8	6137.0	6127.3	6131.5
G4.0	6117.9	6123.5	6133.9	6151.6	6125.6	6134.9	6155.0	6136.4	6130.2	6128.0
G5.0	6112.2	6115.3	6131.8	6152.5	6122.2	6136.7	6152.8	6132.6	6119.3	6120.2
G6.0	6092.6	6099.1	6124.4	6145.3	6106.9	6128.6	6144.8	6128.6	6109.5	6112.7
G7.0	6077.8	6085.1	6117.2	6135.7	6097.7	6115.1	6138.6	6121.4	6096.5	6106.7
G8.0	6056.3	6070.0	6097.3	6119.2	6081.5	6104.5	6130.7	6110.6	6080.7	6088.9
G9.0	6040.4	6050.3	6084.9	6104.3	6066.0	6090.6	6120.0	6097.5	6066.3	6072.7
G10.0	6030.0	6042.5	6072.8	6093.8	6044.3	6081.1	6113.8	6082.5	6061.1	6056.5
G11.0	6019.7	6028.8	6058.7	6072.4	6025.4	6065.4	6092.4	6066.6	6048.7	6035.6
G12.0	5999.4	6005.0	6040.5	6059.2	6016.5	6038.9	6071.4	6051.2	6028.4	6013.4
G13.0	5975.2	5977.0	6022.0	6034.5	6002.5	6020.0	6058.2	6033.3	6001.0	5986.8
G14.0	5946.5	5950.4	5995.3	6008.8	5985.4	5994.5	6039.6	6017.8	5972.5	5959.3
G15.0	5918.8	5919.8	5967.5	5985.8	5961.4	5971.2	6015.9	5994.8	5946.4	5937.9
G16.0	5891.4	5891.3	5945.8	5958.7	5935.4	5946.6	5990.5	5971.2	5920.2	5913.1
G17.0	5859.1	5866.9	5916.9	5927.4	5903.4	5913.8	5962.7	5940.8	5894.3	5884.7
G18.0	5827.5	5834.7	5868.8	5898.6	5873.4	5885.1	5936.8	5909.2	5854.3	5860.2
G19.0	5788.7	5805.2	5847.8	5872.8	5826.6	5851.1	5907.0	5871.2	5826.9	5828.5
G20.0	5757.1	5765.5	5816.2	5842.9	5797.3	5818.3	5872.7	5838.9	5795.7	5793.2
G21.0	5720.2	5724.8	5777.1	5803.0	5759.0	5782.8	5837.4	5804.5	5760.0	5758.1
G22.0	5683.0	5687.5	5740.7	5761.2	5724.6	5747.6	5799.3	5772.7	5720.0	5722.0
G23.0	5632.6	5651.8	5699.4	5726.5	5686.0	5703.6	5762.2	5741.2	5677.8	5685.1
G24.0	5589.2	5599.6	5660.8	5693.0	5648.6	5665.6	5721.3	5701.0	5641.1	5643.4
G25.0	5540.5	5553.1	5616.4	5655.9	5610.6	5635.4	5680.9	5662.7	5599.5	5603.6
G26.0	5492.3	5505.1	5570.0	5596.8	5562.9	5598.6	5636.7	5620.6	5558.2	5563.0
G27.0	5448.9	5456.0	5525.4	5556.2	5514.1	5553.1	5589.6	5572.7	5515.0	5499.5
G28.0	5395.5	5408.8	5479.9	5510.8	5458.4	5506.0	5538.1	5521.4	5467.8	5452.3
G29.0	5338.2	5359.0	5422.3	5456.5	5401.6	5455.1	5491.2	5463.1	5403.9	5407.9
G30.0	5282.5	5304.6	5370.9	5399.0	5344.1	5391.9	5431.1	5415.0	5353.8	5356.2
G31.0	5224.6	5252.2	5321.9	5341.5	5288.0	5335.7	5381.8	5360.5	5306.4	5305.5
G32.0	5163.4	5193.6	5276.4	5280.1	5234.0	5278.1	5336.3	5306.8	5253.2	5242.9
G33.0	5098.1	5137.3	5217.9	5214.6	5167.7	5216.5	5287.3	5249.8	5197.7	5180.4
G34.0	5036.4	5077.1	5155.4	5148.9	5099.3	5153.1	5232.7	5198.2	5140.5	5117.5
G35.0	4968.3	5013.4	5092.2	5081.8	5016.1	5083.0	5160.6	5142.6	5071.4	5064.2
G36.0	4894.6	4942.2	5015.0	5005.1	4948.4	5013.3	5096.7	5068.6	4998.1	5006.8

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G37.0	4821.5	4875.1	4943.2	4934.6	4875.7	4937.3	5034.9	5000.1	4934.9	4940.2
G38.0	4751.8	4804.1	4872.5	4853.6	4802.4	4864.4	4961.9	4933.6	4873.9	4860.7
G39.0	4680.5	4728.2	4794.8	4780.0	4733.6	4789.7	4881.9	4863.2	4800.1	4784.8
G40.0	4594.1	4647.8	4715.5	4704.0	4655.9	4711.1	4810.3	4790.8	4728.6	4709.1
G41.0	4511.9	4575.7	4637.6	4613.4	4567.1	4624.5	4722.6	4721.7	4651.6	4636.0
G42.0	4429.1	4494.9	4555.7	4530.4	4481.0	4537.0	4647.9	4646.0	4568.3	4562.3
G43.0	4342.5	4413.8	4471.8	4435.7	4375.3	4445.9	4564.4	4560.7	4496.3	4479.3
G44.0	4262.1	4323.9	4379.5	4334.2	4283.5	4351.3	4475.1	4475.1	4406.1	4389.7
G45.0	4170.1	4235.1	4293.8	4234.5	4197.4	4253.3	4378.3	4393.4	4322.0	4307.5
G46.0	4080.6	4153.0	4196.5	4122.3	4107.0	4155.4	4282.3	4309.2	4230.7	4226.0
G47.0	3989.7	4063.1	4101.3	4029.2	4002.3	4060.5	4186.2	4219.4	4140.0	4137.2
G48.0	3902.1	3965.7	3999.7	3930.4	3672.3	3954.0	4092.3	4131.9	4048.7	4038.7
G49.0	3799.3	3873.1	3902.8	3819.4	3326.3	3863.8	3996.8	4027.9	3952.5	3941.2
G50.0	3700.1	3780.1	3802.1	3516.9	3183.4	3700.1	3892.3	3933.4	3856.3	3838.0
G51.0	3601.3	3679.8	3684.6	3161.1	3094.1	3295.6	3781.5	3836.1	3750.5	3739.3
G52.0	3495.3	3573.0	3558.3	3016.3	2989.4	3060.8	3679.0	3732.9	3648.0	3641.4
G53.0	3391.5	3455.8	3442.2	2926.5	2894.4	2966.6	3546.8	3625.8	3541.1	3521.7
G54.0	3251.4	3348.6	3332.9	2825.4	2806.1	2858.7	3426.6	3515.7	3372.3	3419.1
G55.0	3118.7	3231.6	3218.5	2724.8	2683.0	2757.0	3299.9	3396.9	3238.3	3307.9
G56.0	3002.2	3068.4	3101.3	2633.4	2201.4	2658.1	3196.1	3248.2	3134.4	3178.7
G57.0	2845.2	2949.2	2827.1	2500.6	2095.1	2580.0	3074.5	3086.9	2966.6	3018.5
G58.0	2736.5	2811.2	2505.1	2029.6	2009.5	2209.0	2835.8	2972.7	2841.6	2907.9
G59.0	2613.3	2670.4	2356.3	1935.9	1920.0	1974.5	2490.2	2813.0	2729.3	2769.0
G60.0	2462.3	2535.5	2258.8	1847.1	1620.8	1882.1	2328.6	2669.5	2585.2	2627.8
G61.0	2344.3	2399.4	2161.2	1749.6	1384.1	1782.2	2215.2	2551.2	2447.0	2528.8
G62.0	2190.2	2236.4	2045.2	1364.0	1207.1	1639.0	2098.3	2389.5	2287.0	2380.3
G63.0	2054.5	2107.7	1908.8	1255.8	1079.7	1287.3	1946.2	2234.8	2159.2	2251.8
G64.0	1910.6	1953.4	1590.2	1033.6	1011.7	1197.8	1848.3	2092.8	2007.8	2104.4
G65.0	1767.4	1815.1	1395.9	967.4	881.8	989.2	1573.2	1948.1	1887.3	1966.7
G66.0	1638.9	1676.2	1298.7	899.6	625.4	925.1	1332.2	1801.6	1743.0	1790.9
G67.0	1507.3	1519.9	1190.8	588.4	581.8	810.0	1225.5	1661.6	1579.9	1680.2
G68.0	1380.6	1371.0	874.3	540.9	327.3	560.4	1105.7	1508.3	1450.5	1531.9
G69.0	1243.6	1235.5	763.1	431.8	275.1	512.9	827.3	1365.0	1326.7	1381.4
G70.0	1124.7	1092.1	624.0	258.8	249.4	275.4	726.5	1216.8	1202.0	1231.5
G71.0	998.4	876.4	559.1	236.4	222.1	244.9	580.8	1072.7	1055.9	1110.4
G72.0	872.2	758.5	369.4	213.7	193.5	225.5	519.4	915.2	921.4	979.4
G73.0	765.9	663.7	324.1	185.6	169.9	199.5	350.3	716.9	803.1	853.3

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G74.0	662.4	558.5	189.0	159.5	148.3	169.3	299.3	597.3	690.9	707.5
G75.0	548.8	446.8	166.7	137.4	126.1	145.5	179.5	507.9	568.6	545.9
G76.0	440.1	335.0	145.5	115.5	108.6	123.2	158.2	397.0	466.6	459.0
G77.0	349.2	249.3	118.3	89.7	86.3	103.0	132.4	293.4	379.5	377.8
G78.0	257.7	168.7	94.3	77.2	68.1	87.7	109.4	234.5	305.3	287.3
G79.0	189.5	118.3	68.4	61.3	57.0	69.3	86.7	154.6	233.0	210.6
G80.0	130.0	81.3	57.4	49.9	37.3	51.7	65.9	119.7	169.3	164.1
G81.0	80.9	62.4	36.2	38.4	29.5	41.2	52.6	83.3	113.2	122.8
G82.0	62.4	49.7	30.0	25.4	21.4	32.8	38.7	68.4	74.6	83.0
G83.0	43.0	34.2	23.9	14.0	12.7	18.7	29.2	48.6	53.7	65.9
G84.0	31.8	30.8	16.8	0.0	0.0	16.0	22.3	38.6	47.0	45.3
G85.0	25.0	16.0	8.2	0.0	0.0	9.4	7.9	27.4	34.7	38.2
G86.0	19.2	13.8	7.9	0.0	0.0	10.4	7.3	26.0	24.9	27.1
G87.0	12.0	10.9	0.0	0.0	0.0	9.0	0.0	18.6	21.1	16.9
G88.0	7.4	8.2	10.6	0.0	0.0	8.6	7.3	13.2	17.4	17.1
G89.0	11.1	7.5	8.4	0.0	0.0	7.6	0.0	11.7	0.0	10.2
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G94.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G96.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G97.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G98.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G99.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G101.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G103.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G104.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G106.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G107.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G108.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G109.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G112.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G113.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G114.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G116.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G119.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G121.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G122.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G124.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G125.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G126.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G127.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G128.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G129.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G130.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G131.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G132.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G133.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G134.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G135.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G136.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G137.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G139.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G140.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G141.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G142.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G143.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G144.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G145.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G146.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G147.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G148.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G149.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G151.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G152.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G153.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G154.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G156.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G157.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G158.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G159.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G160.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G161.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G162.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G163.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G164.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G165.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G166.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G167.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G168.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G169.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G170.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G171.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G172.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G173.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G174.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G175.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G176.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G177.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G178.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G179.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G180.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:



## Candlepower Table (Continue 5)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G0.0	6132.9	6132.9	6132.9	6132.9	6132.9	6132.9	6132.9			
G1.0	6137.9	6133.3	6128.3	6127.0	6132.2	6141.0	6129.7			
G2.0	6136.6	6129.7	6120.3	6123.0	6121.4	6134.2	6126.2			
G3.0	6129.8	6120.4	6099.5	6118.4	6111.7	6128.4	6120.6			
G4.0	6124.0	6106.3	6073.6	6108.1	6099.3	6118.0	6117.9			
G5.0	6110.8	6096.0	6054.2	6089.0	6087.8	6109.4	6112.2			
G6.0	6098.0	6094.0	6049.3	6077.3	6070.5	6094.4	6092.6			
G7.0	6075.2	6081.6	6039.0	6064.7	6054.0	6071.3	6077.8			
G8.0	6062.9	6067.9	6026.1	6052.4	6041.6	6054.4	6056.3			
G9.0	6048.1	6042.1	6000.6	6033.5	6022.3	6037.3	6040.4			
G10.0	6041.9	6023.5	5974.3	6016.4	6002.9	6017.6	6030.0			
G11.0	6021.1	5994.1	5942.7	6002.6	5981.7	5992.4	6019.7			
G12.0	6001.3	5966.2	5922.3	5981.5	5960.2	5962.0	5999.4			
G13.0	5985.8	5946.2	5907.0	5950.2	5929.5	5936.1	5975.2			
G14.0	5961.1	5924.3	5877.1	5923.3	5904.3	5918.7	5946.5			
G15.0	5934.6	5896.0	5847.8	5894.1	5875.1	5897.0	5918.8			
G16.0	5906.1	5864.5	5828.7	5861.7	5846.4	5868.1	5891.4			
G17.0	5881.4	5829.7	5804.1	5830.2	5807.8	5837.6	5859.1			
G18.0	5842.0	5798.7	5769.0	5792.4	5767.7	5801.7	5827.5			
G19.0	5809.8	5758.1	5739.6	5757.3	5730.6	5761.2	5788.7			
G20.0	5774.5	5714.9	5691.0	5716.8	5693.0	5726.6	5757.1			
G21.0	5736.3	5678.3	5658.1	5681.8	5652.8	5692.3	5720.2			
G22.0	5694.1	5636.6	5626.1	5640.8	5611.0	5650.6	5683.0			
G23.0	5649.3	5594.2	5586.1	5600.1	5566.9	5604.9	5632.6			
G24.0	5607.6	5550.4	5527.5	5550.7	5522.6	5560.5	5589.2			
G25.0	5561.2	5502.1	5480.4	5500.5	5480.0	5515.3	5540.5			
G26.0	5515.0	5454.7	5434.6	5442.3	5427.8	5468.0	5492.3			
G27.0	5479.5	5396.6	5384.6	5391.0	5371.3	5414.6	5448.9			
G28.0	5427.9	5343.3	5331.9	5339.8	5322.6	5365.5	5395.5			
G29.0	5372.2	5290.4	5271.9	5279.3	5268.9	5311.2	5338.2			
G30.0	5316.4	5232.0	5219.2	5224.4	5213.2	5253.6	5282.5			
G31.0	5260.0	5177.7	5164.2	5169.6	5152.4	5192.7	5224.6			
G32.0	5202.0	5116.6	5090.6	5110.6	5094.3	5133.5	5163.4			
G33.0	5131.8	5052.6	5023.0	5047.7	5028.7	5078.9	5098.1			
G34.0	5072.4	4992.8	4955.3	4986.1	4969.7	5016.0	5036.4			
G35.0	5005.7	4925.2	4900.3	4924.0	4902.7	4942.3	4968.3			
G36.0	4944.8	4865.2	4827.1	4860.1	4838.6	4874.1	4894.6			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 6)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G37.0	4888.9	4787.8	4747.2	4794.3	4771.2	4803.4	4821.5			
G38.0	4815.1	4723.4	4658.1	4724.6	4695.6	4730.5	4751.8			
G39.0	4752.7	4647.8	4579.6	4636.6	4623.1	4653.4	4680.5			
G40.0	4674.3	4572.1	4498.0	4564.5	4552.6	4587.7	4594.1			
G41.0	4593.4	4489.2	4426.9	4483.1	4475.9	4508.2	4511.9			
G42.0	4518.8	4402.2	4342.2	4395.3	4398.8	4426.0	4429.1			
G43.0	4436.0	4311.8	4243.3	4314.6	4309.3	4347.0	4342.5			
G44.0	4362.9	4231.6	4159.1	4222.7	4229.5	4257.8	4262.1			
G45.0	4285.6	4149.4	4069.4	4139.0	4145.1	4173.7	4170.1			
G46.0	4201.3	4063.8	3983.4	4045.7	4061.1	4089.5	4080.6			
G47.0	4110.3	3950.3	3891.2	3947.9	3973.4	4000.8	3989.7			
G48.0	4012.1	3851.0	3808.5	3843.8	3876.5	3908.3	3902.1			
G49.0	3915.2	3760.7	3719.7	3744.2	3787.2	3806.0	3799.3			
G50.0	3819.1	3669.9	3625.7	3653.7	3688.5	3709.7	3700.1			
G51.0	3719.5	3577.8	3512.8	3558.0	3594.5	3613.9	3601.3			
G52.0	3618.6	3462.2	3409.0	3459.3	3482.2	3517.6	3495.3			
G53.0	3514.0	3362.7	3195.5	3340.3	3375.9	3404.8	3391.5			
G54.0	3397.8	3264.2	2807.5	3236.6	3270.3	3303.7	3251.4			
G55.0	3289.2	3125.0	2641.6	3075.2	3165.1	3191.3	3118.7			
G56.0	3155.6	2702.5	2556.7	2678.3	3043.1	3044.9	3002.2			
G57.0	3052.5	2517.2	2471.7	2497.8	2938.8	2914.9	2845.2			
G58.0	2940.6	2431.9	2382.2	2412.5	2830.3	2789.2	2736.5			
G59.0	2826.8	2351.9	2292.5	2319.7	2719.5	2642.4	2613.3			
G60.0	2700.3	2255.1	2197.1	2230.8	2607.7	2529.1	2462.3			
G61.0	2582.2	2156.7	1819.5	2146.3	2494.6	2396.8	2344.3			
G62.0	2397.2	2055.5	1679.6	2004.2	2251.7	2256.0	2190.2			
G63.0	2040.2	1690.5	1612.2	1641.2	1929.7	2113.3	2054.5			
G64.0	1865.7	1560.5	1536.8	1545.5	1809.0	1993.0	1910.6			
G65.0	1784.2	1476.4	1457.5	1465.2	1700.5	1843.5	1767.4			
G66.0	1641.4	1391.8	1264.8	1379.7	1585.5	1713.9	1638.9			
G67.0	1535.0	1306.7	1173.7	1275.0	1485.9	1577.4	1507.3			
G68.0	1425.4	1119.3	874.6	1106.3	1296.2	1445.6	1380.6			
G69.0	1120.6	993.5	808.7	878.8	1051.1	1312.5	1243.6			
G70.0	1008.8	767.8	750.3	745.7	973.5	1185.7	1124.7			
G71.0	916.8	711.3	513.4	697.3	884.7	1055.5	998.4			
G72.0	828.4	625.2	462.1	512.7	763.1	937.1	872.2			
G73.0	684.3	435.9	376.4	432.8	637.2	815.6	765.9			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 7)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G74.0	512.0	397.9	254.2	341.4	454.4	656.4	662.4			
G75.0	437.8	238.2	225.6	235.9	400.2	521.5	548.8			
G76.0	381.5	218.4	197.4	208.7	278.0	428.3	440.1			
G77.0	261.0	181.6	172.6	177.2	230.8	350.0	349.2			
G78.0	212.2	160.6	153.1	150.0	148.7	249.5	257.7			
G79.0	152.8	141.6	128.3	130.6	128.8	196.3	189.5			
G80.0	124.1	120.5	107.7	115.3	104.5	127.9	130.0			
G81.0	106.7	93.4	92.9	96.0	91.9	87.6	80.9			
G82.0	82.3	84.3	75.7	83.0	75.1	69.1	62.4			
G83.0	64.2	64.2	66.6	66.6	58.4	53.2	43.0			
G84.0	48.3	53.5	45.4	48.3	41.8	40.2	31.8			
G85.0	38.6	42.6	30.5	31.0	31.2	32.2	25.0			
G86.0	37.8	25.2	21.1	28.3	23.7	24.5	19.2			
G87.0	23.8	21.9	18.8	17.8	19.9	16.6	12.0			
G88.0	18.1	14.1	10.4	12.8	11.5	9.7	7.4			
G89.0	13.5	10.7	0.0	11.2	9.1	7.9	11.1			
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G94.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G96.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G97.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G98.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G99.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G101.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G103.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G104.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G106.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G107.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G108.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G109.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 8)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G112.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G113.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G114.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G116.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G119.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G121.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G122.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G124.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G125.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G126.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G127.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G128.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G129.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G130.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G131.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G132.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G133.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G134.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G135.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G136.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G137.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G139.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G140.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G141.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G142.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G143.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G144.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G145.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G146.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G147.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 9)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G148.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G149.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G151.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G152.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G153.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G154.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G156.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G157.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G158.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G159.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G160.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G161.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G162.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G163.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G164.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G165.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G166.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G167.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G168.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G169.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G170.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G171.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G172.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G173.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G174.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G175.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G176.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G177.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G178.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G179.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
G180.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature: 24.8 'C

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-3000

Distance: 14.140 m [K=1.0000]

Humidity:

Inspector: