


LED Area Light (Wolf GSR)

CERTIFICATIONS



PRODUCT FEATURES

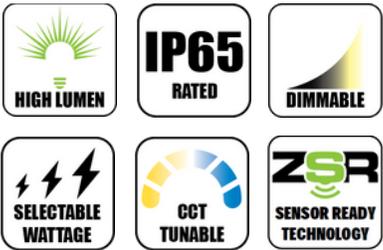

Construction

- Corrosion Resistant Diecast Aluminum Housing with Powder Coat Finish
- Integrated heat sink

Applications

- General Outdoor Area & Site Lighting
- Auto Dealerships
- Parking Lot
- Roadway
- Security Lighting
- Campuses

Mounting

- Slipfitter - Fits over existing pole tenons
- Arm Mount - Direct mounting on pole or wall
- Trunnion Mount - To mount on walls

Warranty

7-Year Limited Product Warranty
(Optional 10-Year Warranty available)

BENEFITS

- Dimmability 0-10V
- Versatile mounting options for poles, walls, etc.
- Longer lifespan up to 70,000 life span hours
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.



SPECIFICATIONS

Available Wattage	60W - 300W
Available CCT	3000K - 5000K
Efficacy Average	155 LM/W
Lumen Output	9,300LM - 46,500 LM
Input Voltage	AC 120-277V, 277 -480v
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	<20%
Working Temp	-40F to 122 (-40C to 50C)
Lens	Type III
IP Rating	IP65
Dimming	Yes
Life Span (Hours)	70,000

LED Area Light (Wolf GSR)


Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05970	S-G5836R	60W 80W 100W	3000K 4000K 5000K	155 LM/W	9,300 LM 12,400 LM 15,500 LM	120-277V	Bronze
05971	S-WGK601	120W 135W 150W			18,600 LM 20,925 LM 23,250 LM		
05972	S-ERNBKM	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM		
05973	S-AW6CQF	260W 280W 300W			40,300 LM 43,400 LM 46,500 LM	277-480V	
05974	S-JZOFTS	120W 135W 150W			18,600 LM 20,925 LM 23,250 LM		
05975	S-FE2JLN	260W 280W 300W			40,300 LM 43,400 LM 46,500 LM		
05980	S-WGK601	120W 135W 150W	3000K 4000K 5000K	155 LM/W	18,600 LM 20,925 LM 23,250 LM	120-277V	Black
05981	S-ERNBKM	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM		
05982	S-AW6CQF	260W 280W 300W			40,300 LM 43,400 LM 46,500 LM		
05985	S-WGK601	120W 135W 150W			18,600 LM 20,925 LM 23,250 LM	277-480V	
05983	S-ERNBKM	200W 220W 240W			31,000 LM 34,100 LM 37,200 LM		
05984	S-AW6CQF	260W 280W 300W			40,300 LM 43,400 LM 46,500 LM		

↑ When placing your order, please use Order Code.

LED Area Light (Wolf GSR)

MOUNTS

Order Code	Description	Color
05755	Slipfitter Mount	Bronze
05756	Arm Mount	Bronze
05757	Trunnion Mount	Bronze
05761	Slipfitter Mount	Black
05762	Arm Mount	Black
05763	Trunnion Mount	Black
05764	Slipfitter Mount	Silver
05765	Arm Mount	Silver
05766	Trunnion Mount	Silver

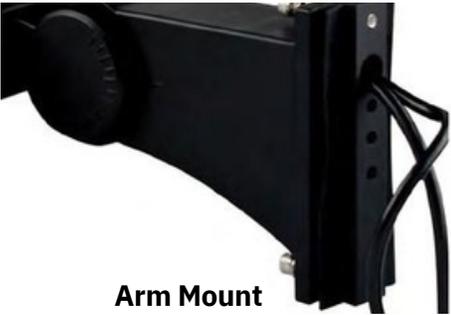

Arm Mount



Slipfitter Mount



Trunnion Mount


LIGHTING CONTROLS

Order Code	Description
05714	Blue Twist Lock Photocell 100-277V UL Listed
05715	Blue Twist Lock Photocell 480V UL Listed
06251	DC Powered 3 in 1 Indoor PIR Stand-Alone Control 40ft for 01 ZSR Fixtures
06278	Remote Control 1 Scene Programming with LCD Display White
06264	WH DC Powered BLE PIR (SkyFi Blu Pro) Occ Control w/ Daylight Harvesting White 40ft for 01 ZSR & Z10 Fixtures
06270	DC Powered BLE PIR (LightLinq) Occ Control w/ Daylight Harvesting White 40ft for All ZSR Fixtures


LED Area Light (Wolf GSR)

PHOTOMETRIC DATA

Polar Curve

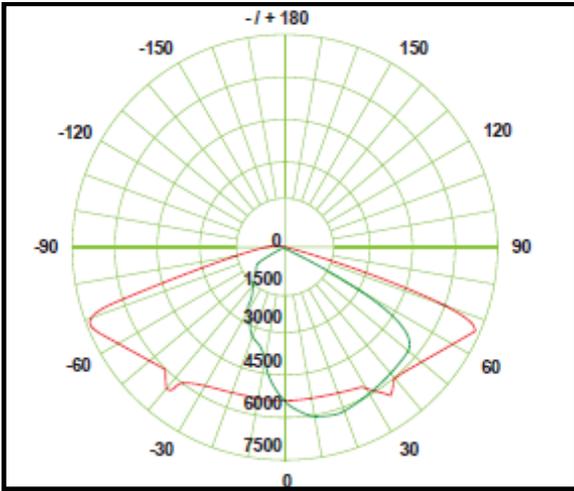

Cone Chart

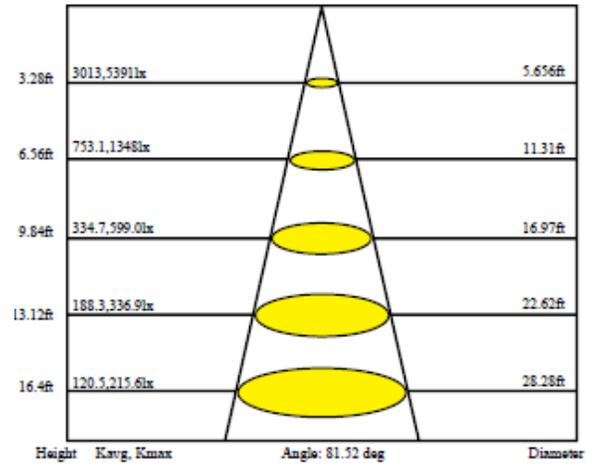

DIMENSIONS

