



# LED Strip Fixture Retrofit (Lily S & GSR)

## CERTIFICATIONS



## PRODUCT FEATURES



### Construction

Aluminum with removable polycarbonate lens

### Application

- Retail
- Education
- Offices
- Healthcare
- Other various commercial applications

### Mounting

- Surface Mount

### Warranty

7-Year Limited Warranty  
(Optional 10-Year Warranty available)

## BENEFITS

- LED Saves 60-75% of energy over HID and 40-50% over T8/T5HO.
- Delivers high efficacy illumination at up to 135 lumens per watt ..
- Suitable for damp locations.



## SPECIFICATIONS

Available Wattage	34W - 90W
Available CCT	3500K - 5000K
Efficacy Average	135 LM/W
Lumen Output	4,590 LM - 12,150 LM
Input Voltage	AC120-277V
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	<20%
Working Temp	-4F to 113F (-20C to 45C)
Lens	Frosted
IP Rating	Rated for Damp / Dry Locations
Dimming	Yes
Life Span (Hours)	70,000

### Corporate Office

351 South Main Place, Carol Stream, IL 60188



Phone: 214.571.6374  
Fax: 214.571.6285



www.maverickled.com  
sales@maverickled.com



# LED Strip Fixture Retrofit (Lily S & GSR)

Order Code	DLC Product ID	Size	Watts	CCT	LM/Watt	Total LM	Voltage	Color	
04005	S-KC8FRP	8FT	38W	5000K	135 LM/W	5,130 LM	120 - 277V	White	
			46W			6,210 LM			
			54W			7,290 LM			
04006	S-KC8FRP		38W	3500K		5,130 LM			
			46W	4000K		6,210 LM			
			54W	5000K		7,290 LM			
04008 02	S-HKWA9M	4FT	34W	3500K		4,590 LM			
			38W	4000K		5,130 LM			
			45W	5000K		6,075 LM			
04009 02*	S-G2LU47	8FT	65W	5000K		8,775 LM			
			75W			10,125 LM			
			90W			12,150 LM			
04010 02	S-G2LU47	8FT	65W	3500K		8,775 LM			
			75W	4000K		10,125 LM			
			90W	5000K		12,150 LM			

↑ \* Comes as one complete 8FT fixture

When placing your, please use Order Code.

## LIGHTING CONTROLS

Order Code	Description
06247	LED PIR Fixture Mounted Control Simple On/Off 39FT 120-347V Type D Connector White
06246	LED PIR Fixture Mounted Control 3 in 1 39FT 120-347V Type D Connector White
06267*	DC Powered 3 in 1 Indoor OcuSense Stand-Alone Control For Quick Connect Sensor Ready Fixtures
06278	Remote Control 1 Scene Programming with LCD Display White
06261	BLE PIR Fixture Mounted (SkyFi Blu+) Occupancy Sensor w/ Daylight Harvesting 40ft 100-277V Type D
06265	BLE Fixture Mounted Node (SkyFi Blu+) 120-277V Type D (MES)
06274*	DC Powered BLE OcuSense (Lite LinQ) Occ Control w/ Daylight Harvesting White 17ft For Quick Connect SR Fixtures

\* Works with 02 series fixture only

## Corporate Office

351 South Main Place, Carol Stream, IL 60188



Phone: 214.571.6374  
Fax: 214.571.6285




www.maverickled.com  
sales@maverickled.com


# LED Strip Fixture Retrofit (Lily S & GSR)

## PHOTOMETRIC DATA


Polar Curve

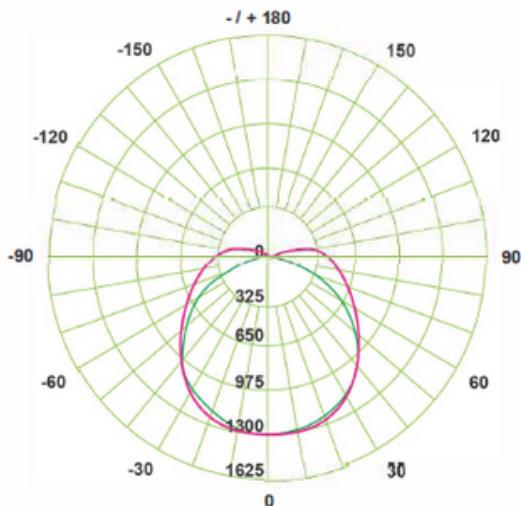

Cone Chart

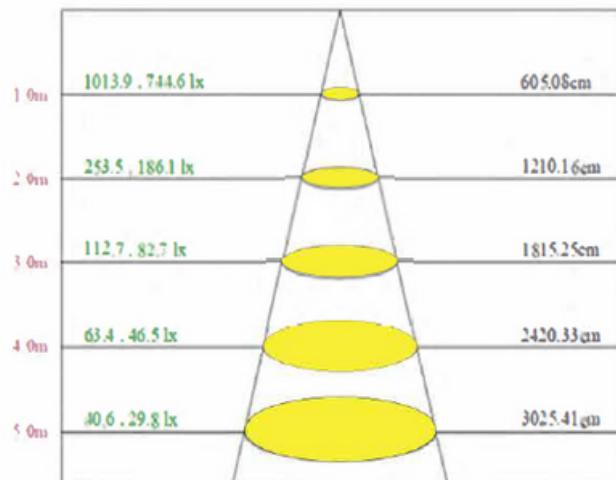

## DIMENSIONS

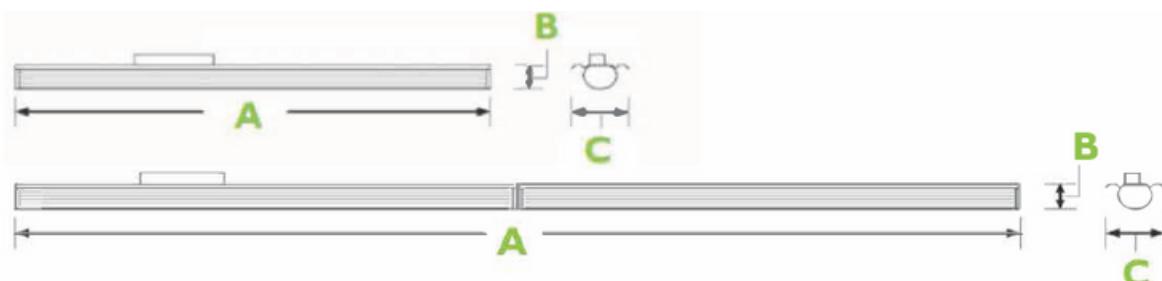

Fixture Length	A	B	C
8Ft	96"	2.36"	5.7"
4FT	48"	2.36"	5.7"

