

INTRINSIX



PIR SENSORS

KNOCK OUT SENSORS

PRODUCT PROFILE

PIR SENSORS

KNOCKOUT SENSORS



Description

Side Mount PIR Sensor can be mounted into a $\frac{1}{2}$ " knockout on most indoor lighting fixtures and offers multi-level control based on motion and daylight contribution.

Most commonly used in indoor high bay lighting applications.

Specifications

- Detection Zone: Maximum coverage 60' dia. from 8-50' height / 360°
- Voltage: 120V-277V 50/60Hz
- Mounting Height: 8'-50'
- Operating Temp: -40°F to 167°F
- UL listing: UL773A
- * Emergency Back up: Yes (Battery)
- Warranty: 50,000 hours/5 years


Fixture Details

Product Number	Type	Bluetooth Enabled	Bluetooth Transmission	Maximum Coverage	Mounting Height	Operating Temperature
IX-HB-BIPIR-1/2KO	High Bay	No	N/A	60' (8-20' height @ 360°)	8'-50'	-40°F- 167°F
IX-PIRBLE-KO	High Bay	Yes	Up to 200'	40 - 80'	8'50'	-22°F- 131°F



Product Dimensions

IX-PIRBLE-KO

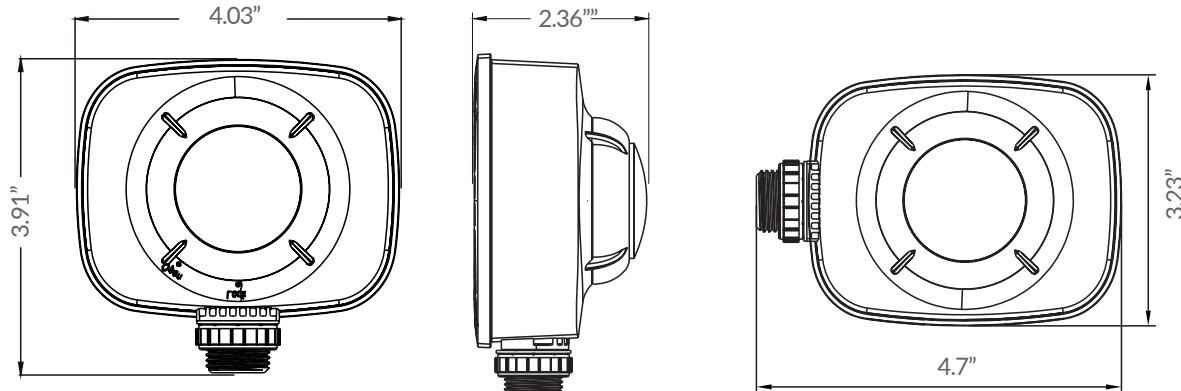

The ETL Listed mark is an indicator of the product's compliance with safety regulations, recognized and accepted by the UL and CSA marks. As Intertek's ETL subjects' products to UL standards for safety, products marked as ETL Listed meet the same rigorous criteria as marked with UL Listed or UL Recognized. Intertek ETL is a Nationally Recognized Testing Laboratory (NRTL) recognized by the Occupational Safety and Health Administration (OSHA).



The Federal Communications Commission (FCC) is an independent agency of the United States government that was created to regulate all forms of telecommunication inside of the U.S. including the radio frequency (RF) of electronics. Our products are fully tested to ensure that they will not electromagnetically interfere with other products nor cause risk to the public as required by law.