


LINEA X

Architectural Strip Fixture

DIRECT/INDIRECT SERIES LINEAR LUMINAIRE



LUXURIO
by INTRINSIX

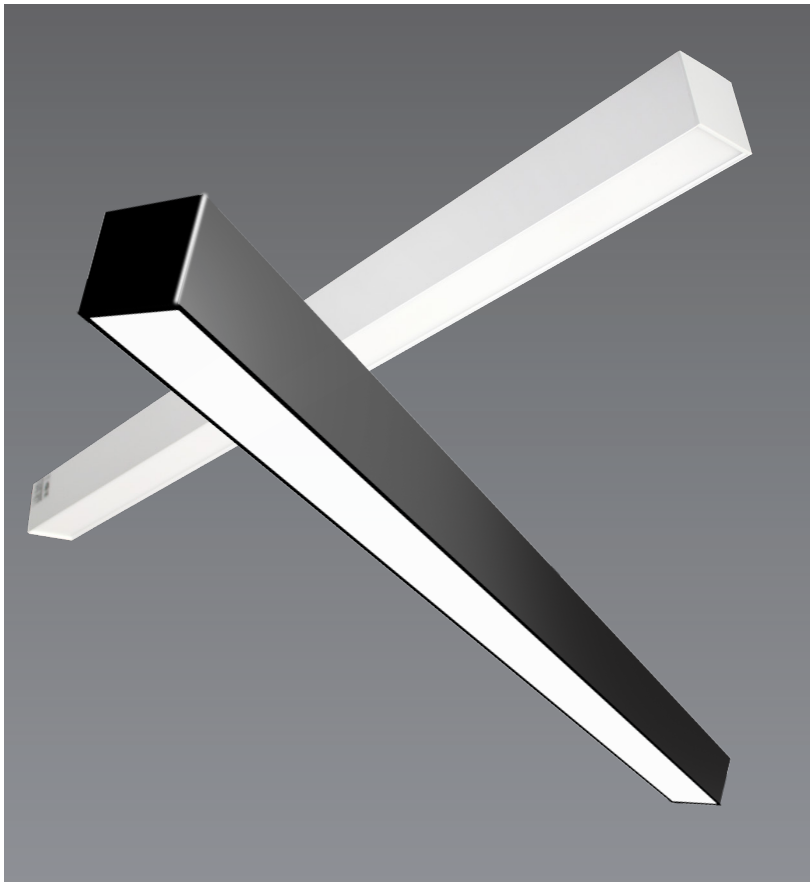


Description

The Linea X is a 2.75" wide Architectural Linear Fixture. This direct and direct/indirect fixture is available in lengths of 4 and 8' and can be continuously run. This specific modular design can be suspended, mounted on a wall or ceiling giving more flexibility. This is quickly becoming the go to choice for many commercial designers and architects.

- Independently modular direct & indirect luminaries
- Suspended & wall mount available in 4' and 8' lengths, up to 1250 lumens per foot
- Working voltage 120-347V
- Unique end cap simplifies installation, seamless continuous runs or individual units
- Specially designed light source with PC diffuser producing soft light

Configurations: downlight only

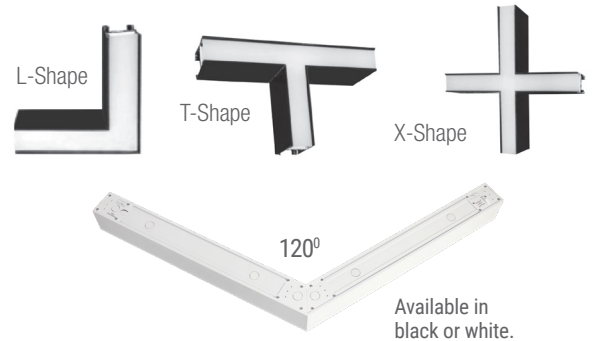

Mounting Options




Model	Shape	Watts
L-ASFL-04-20W-35/40/50LO-BK	L-Shape	20W
L-ASFT-04-30W-35/40/50LO-BK	T-Shape	30W
L-ASFX-04-40W-35/40/50LO-BK	X-Shape	40W
L-ASF-120-40W-35/40/50LO	120° angle	40W

Color control:

Color changeable

Up & Down Light



Product Number	Up/down %	Efficacy (Lm/W)	Size Length	Wattage (W)	CCT (K) Selectable	CRI	Voltage (V)	Lumen output (Lm)	ETL ID
Architectural Strip Fixture									
L-ASF04-U/D-50W-35/40/50L0-BK	30/70	130	4'	50W	3500/4000/5000	>80	120-277V	6500	Listed
L-ASF04-U/D-50W-35/40/50L0-SV	30/70	130	4'	50W	3500/4000/5000	>80	120-277V	6500	Listed
L-ASF04-U/D-50W-35/40/50L0-WH	30/70	130	4'	50W	3500/4000/5000	>80	120-277V	6500	Listed
L-ASF08-U/D-100W-35/40/50L0-BK	30/70	130	8'	100W	3500/4000/5000	>80	120-277V	1300	Listed
L-ASF08-U/D-100W-35/40/50L0-WH	30/70	130	8'	100W	3500/4000/5000	>80	120-277V	1300	Listed
Recessed Mount Architectural Strip Fixture									
L-RMASF04-40W-35/40/50L0-BK		130	4'	40W	3500/4000/5000	>80	120-277V	5200	Listed
L-RMASF04-40W-35/40/50L0-WH		130	4'	40W	3500/4000/5000	>80	120-277V	5200	Listed
L-RMASF08-70W-35/40/50L0-BK		130	8'	70W	3500/4000/5000	>80	120-277V	9100	Listed
L-RMASF08-70W-35/40/50L0-WH		130	8'	70W	3500/4000/5000	>80	120-277V	9100	Listed
Architectural Strip Fixture L Bracket									
L-ASF04-L-20W-35/40/50L0-BK		130		20W	3500/4000/5000	>80	120-347V	2600	Listed
L-ASF04-L-20W-35/40/50L0-WH		130		20W	3500/4000/5000	>80	120-347V	2600	Listed
Architectural Strip Fixture T Bracket									
L-ASF04-T-30W-35/40/50L0-BK		130		30W	3500/4000/5000	>80	120-347V	3900	Listed
L-ASF04-T-30W-35/40/50L0-WH		130		30W	3500/4000/5000	>80	120-347V	3900	Listed
Architectural Strip Fixture X Bracket									
L-ASF04-X-40W-35/40/50L0-BK		130		40W	3500/4000/5000	>80	120-347V	5200	Listed
L-ASF04-X-40W-35/40/50L0-WH		130		40W	3500/4000/5000	>80	120-347V	5200	Listed
Architectural Strip Fixture 120°									
L-ASF120-40-35/40/50L0-BK		130		40W	3500/4000/5000	>80	120-277V	5200	Listed
L-ASF120-40-35/40/50L0-WH		130		40W	3500/4000/5000	>80	120-277V	5200	Listed

*Only available in 4" direct and indirect

Accessories:

Model	Product Code	Status	Description	ETL
Power Cable	L-ASF-PC-Black, L-ASF-PC-White	Optional	AC, 8' length, 5-Core	Yes
Aircraft Cable	STL	Standard	8' length, 1 Pair	Yes
Canopy Kits	L-ASF-CB-Black, L-ASF-CB-White	Optional	Canopy A & B - 125mm	Yes
Wall Mount Kit	L-ASF04-WMK-BK, L-ASF04-WMK-WH	Optional	Includes all fixings	Yes
Linkable Kit	4FTLBK / 8FTLBK	Optional	Bracket + Internal 5-pins, Power cable	Yes
PIR Sensor				No
Motion Sensor				No
Emergency Backup				No
2.4G Wireless Control				No



Power Cable
AC Power Cable -6ft length



Aircraft Cables
Aircraft Cable -8FT length, 1 Pair



Canopy Kits
A & B - 125mm




Linkable Kit
Bracket + Internal 5-pins, Power cable

FIXTURES:


LuXurio Architectural Strip Fixture
L-ASF04-U/D-50W-BK
L-ASF04-U/D-50W-WH
L-ASF04-U/D-50W-SV



LuXurio Architectural Strip Fixture 120°
L-ASF120-40W-BK
L-ASF120-40W-WH



L-ASF-CB-Black

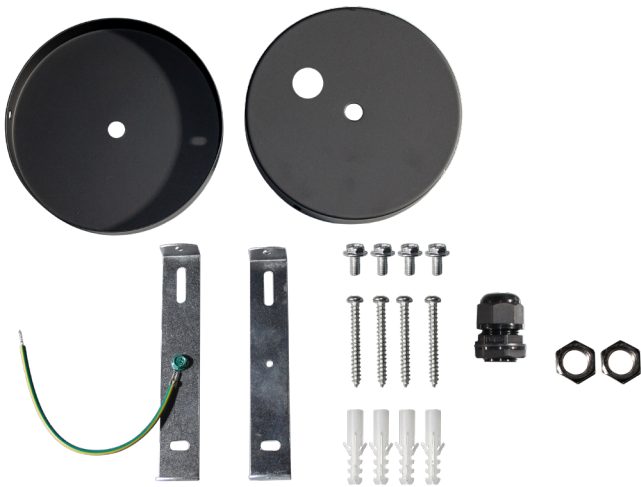

L-ASF-CB-White

